


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		




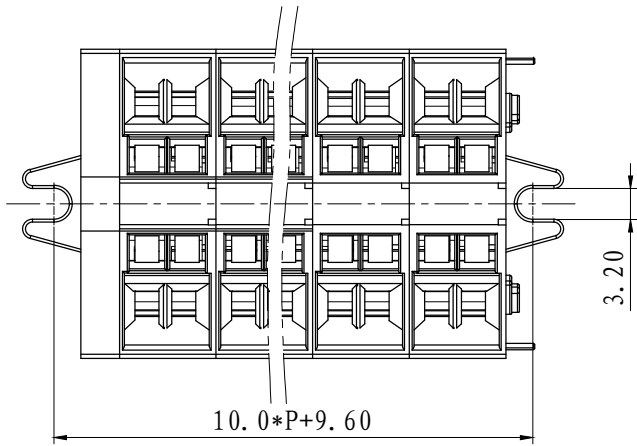


NOTES:

1. Voltage Rating: 600V, Current Rating: 15A
2. PITCH: 10.0mm
3. Using Temperature Range: -40° C - +105° C
4. Suitable Electric Wire: 28-14AWG
5. Insulation Withstands Voltage: AC3000V/min

技术要求:

1. 额定电压: 600V, 额定电流: 15A
2. 间距: 10.0mm
3. 使用条件: -40° - +105°
4. 适用线规: 28-14AWG
5. 耐电压值: AC 3000V/min

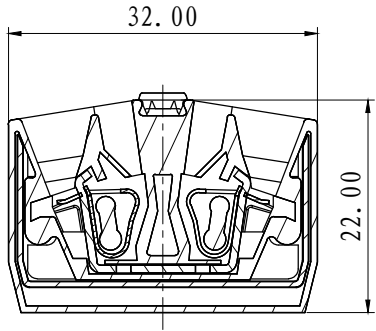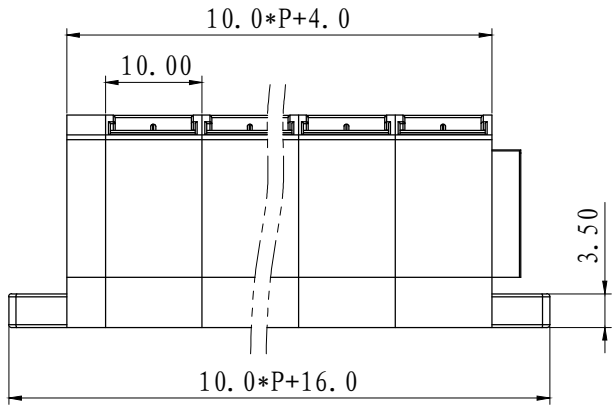

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	254801-空白标记条		2P		
5	LSC1-弹片	F000000250V	4P	不锈钢	
4	MST-2.5/4L-导电件	6083B00010V	P	黄铜	镀镍
3	MSTM-2.5-盖板	6060C0Y01AV	1	PA66	
2	MSTM-2.5/4L-END-本体	6084A0Y01AV	1	PA66	
1	MSTM-2.5/4L-本体	6082A0Y01AV	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 12/12/29	UNITS mm	THIRD ANGLE PROJECTION	
CHK.	DATE		SIZE A4		SHEET 1 of 1
APP.	DATE		SCALE 1:1	DWG NO. SP-1-6082A01	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	MSTM-2.5/4L-XXP-1Y-00A MSTM-2.5/4L-成品