
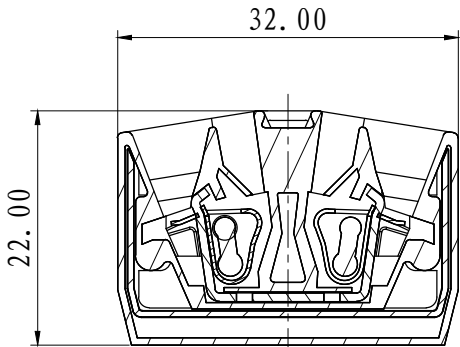
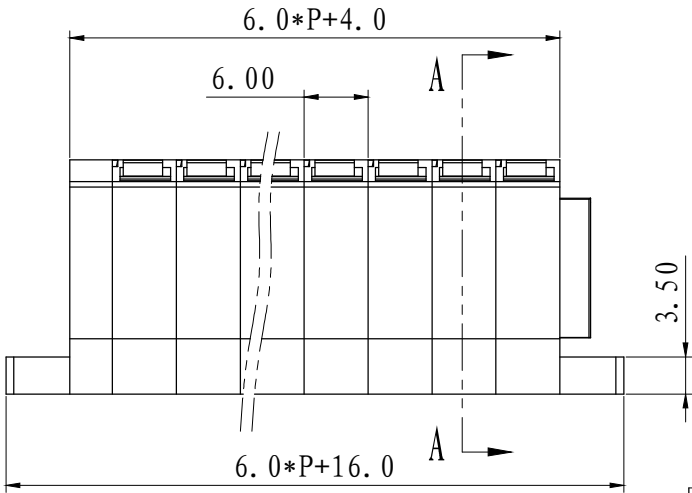



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

- NOTES:
1. Voltage Rating: 600V, Current Rating: 15A
 2. PITCH: 6.0mm
 3. Using Temperature Range: -40° C - +105° C
 4. Suitable Electric Wire: 28-14AWG
 5. Insulation Withstands Voltage: AC3000V/min

- 技术要求:
1. 额定电压：600V，额定电流：15A
 2. 间距：6.0mm
 3. 使用条件：-40° - +105°
 4. 适用线规：28-14AWG
 5. 耐电压值：AC 3000V/min

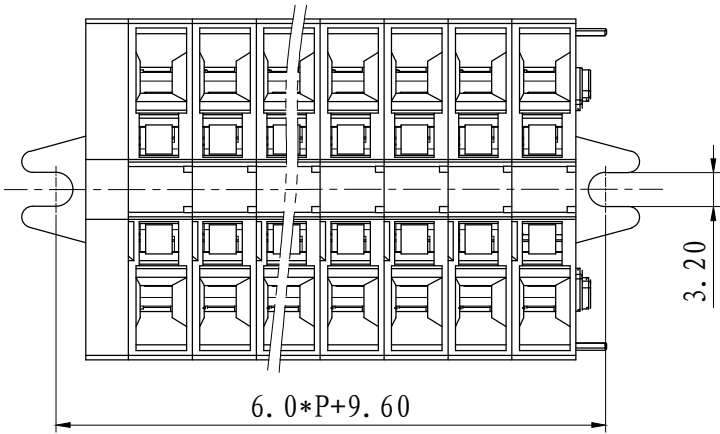

剖面 A-A

	pitch dimension			Naminal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	▬ ▱ ⤿
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LSC1-弹片	F2A0DLSLC1BV	2P	不锈钢	
4	MST-2.5-导电件	6MSTBDD015A1	P	黄铜	镀镍
3	MSTM-2.5-盖板	6MSTC0Y2L02V	1	PA66	
2	MSTM-2.5-END-本体	6MSTM0Y2LE2V	1	PA66	
1	MSTM-2.5-本体	6MSTM0Y2L02V	P	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 12/10/18	UNITS	mm	THIRD ANGLE PROJECTION
CHK.		DATE	SIZE	A4	
APP.		DATE	SCALE	1:1	DWG NO. SP-2-6MST001 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	MSTM-2.5/2L-XXP-1Y-00A MSTM-2.5-成品