
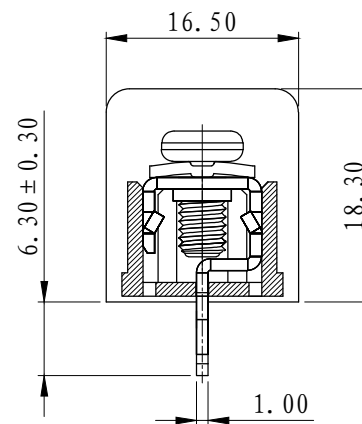
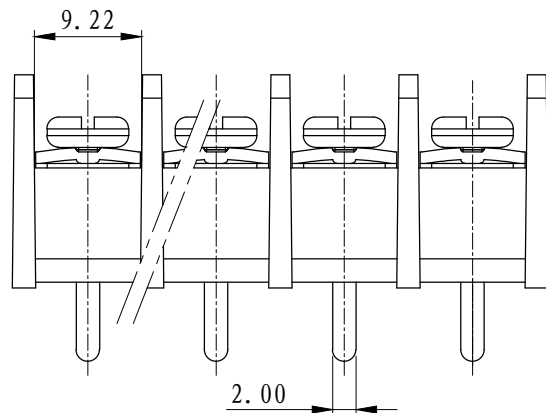
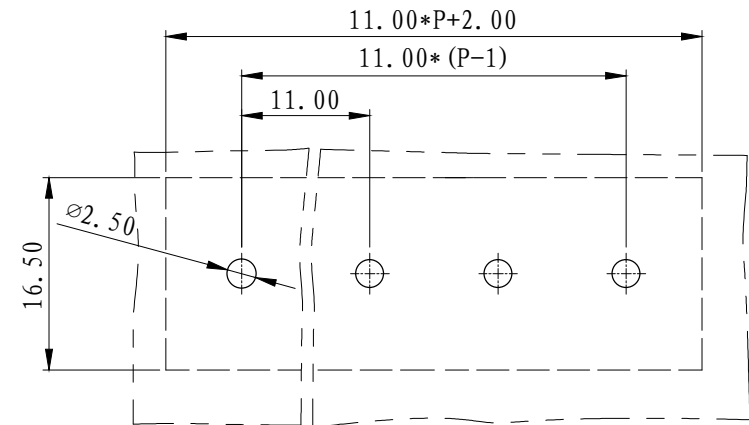



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

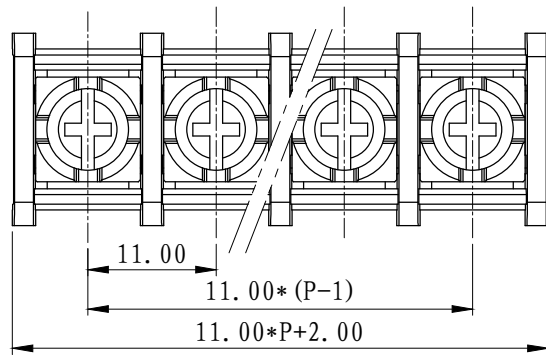

NOTES:

1. Voltage Rating: 300V, Current Rating: 20A
2. PITCH: 11.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40° C ~ +130° C
5. Suitable Electric Wire: AWG 22-12
6. Screw Torque Value: 1.6 N.m

技术要求:

1. 额定电压: 300V, 额定电流: 20A
2. 间距: 11.0mm
3. 耐电压值: AC 2500V/min
4. 使用条件: -40° ~ +130°
5. 适用线规: AWG 22-12
6. 螺丝拉力: 1.6N.m

	pitch dimension			Nominal dimension					
variable range	over	over	over	over	over	over	over	over	—
	0	6	10	0	30	60	100	150	
	to	to	to	to	to	to	to		
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LW1C-11.0焊脚	5008B0001AV	P	黄铜	镀雾锡
2	M4*8-9*9螺丝	SQFFA408062V	P	碳钢	三价铬钝化彩锌
1	LW1-11.0-本体	5008A0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-03-24	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD				TITLE	LW1C-11.0-XXP-1Y-00A
					LW1C-11.0-成品