

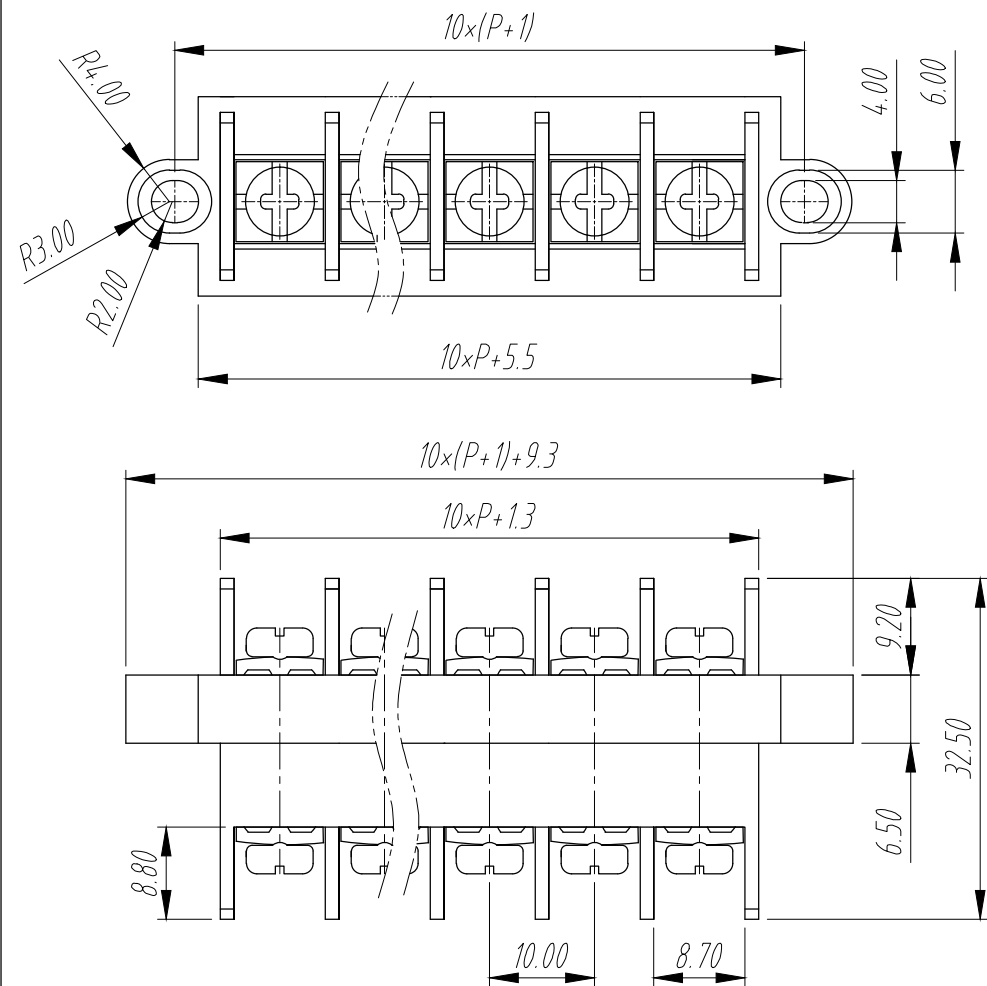


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
	初版发行	ARKINE	2010/10/24

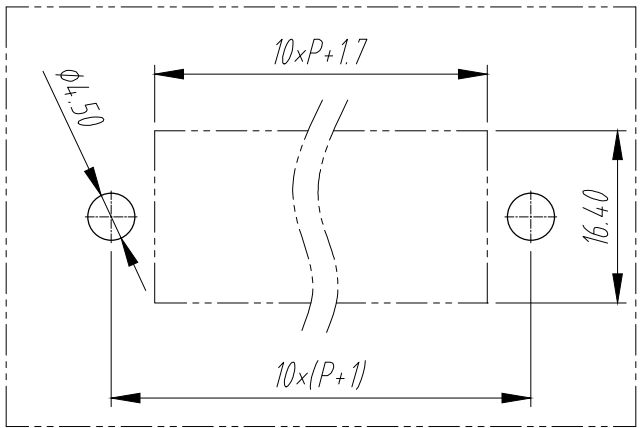

技术要求:

1. 额定电压: 600V, 额定电流: 24A
2. 间距: 10.0mm
3. 耐电压值: AC 3000V/min
4. 绝缘阻抗1000兆欧
5. 使用条件: $-40^{\circ} - +105^{\circ}$
6. 适用线规: AWG 18-10
7. 螺丝扭力: 12-18 kgf-cm

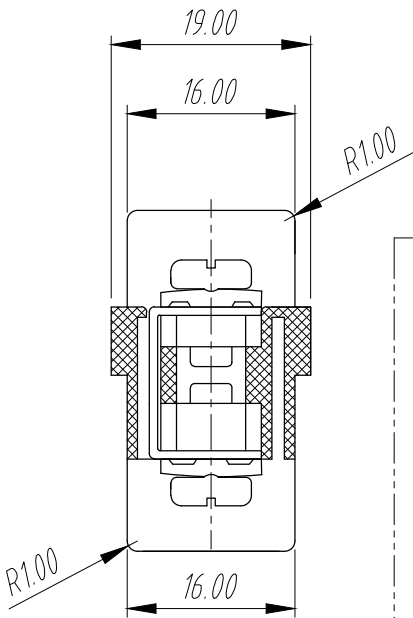

	linear dimension					fillet	chamfer	short angle side				Tolerance			
	to	over	over	over	over		over	to	to	to	to	to	to	to	to
variable range	6	6 to 30	30 to 120	120 to 480	480 to	all	6 to	10 to	50 to	120 to	all	5 to	30 to	120 to	120 to
Tolerance	± 0.1	± 0.2	± 0.3	± 0.5	± 0.9	± 0.2	± 0.5	± 1	1'	30'	20'	10'	0.3	0.025	0.06 0.12 0.4

4.	M4外六角螺母	SM00A400001V	2P	碳钢	镀锌
3.	M4*8-8*8	SPFFA408053AV	2P	碳钢	三价铬钝化彩锌
2.	JSJ-2.5导电件	6JSJBDD025AV	P	黄铜	镀锌
1.	JSJ-2.5壳	6JSJE510250V	1	PC	土黄色
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ZHF	DATE	2019/05/08	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	2: 1
上海联捷电气有限公司 Shanghai Elinker Electric Co., LTD				TITLE	JSJ-2.5-XXP-1Y-00A JSJ-2.5