
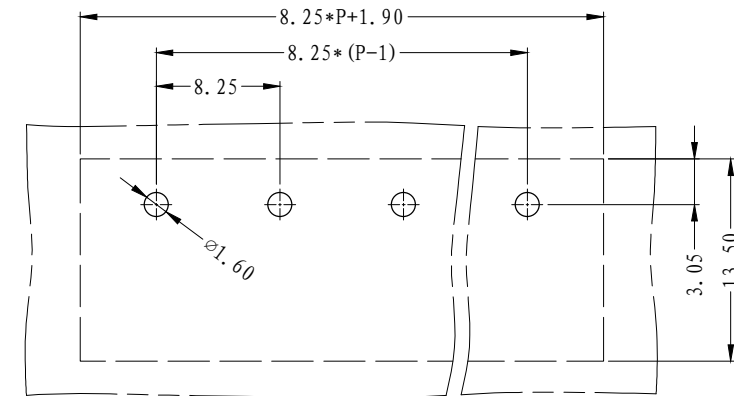
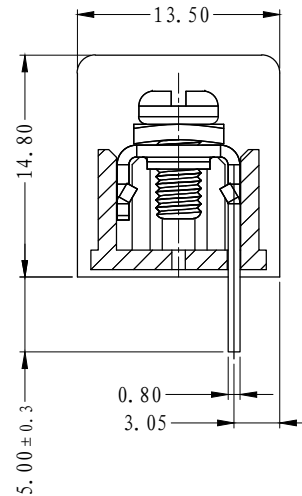
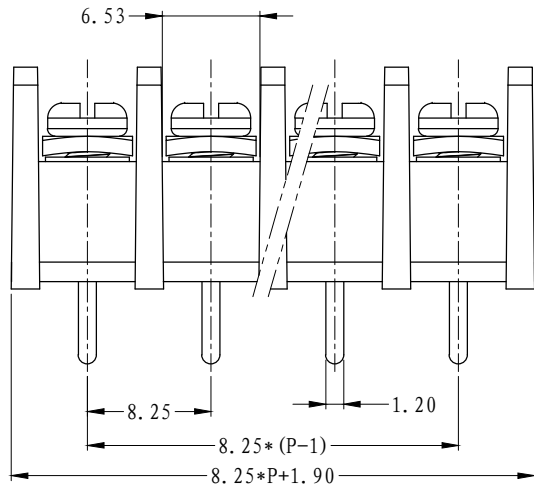


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
	初版发行		

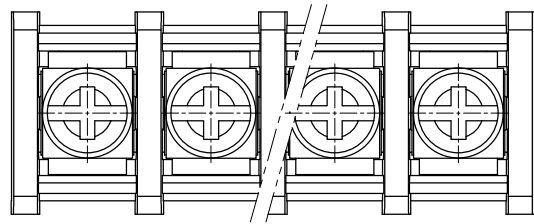

NOTES:
Pitch : 8.25mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage :
AC2500V for 1 minute
Using Temperature Range :
- 40℃ ~ + 130℃
Wire range : 22~12 AWG
Screw Torque Value : 0.5Nm

技术要求:
间距: 8.25mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 0.5Nm

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M3*6-6*6		SQFFA306023V		P	碳钢	三价铬钝化彩锌	
2	LW1B-7.62-焊脚		5010B0002AV		P	黄铜	镀雾锡	
1	LW1-8.25-本体		5014A0YXXAV		1	PBT		
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES	
DES.	CMZ	DATE	24/09/14	UNITS	MM	THIRD ANGLE PROJECTION	SHEET	
CHK.		DATE		SIZE	A4		1 of 1	
APP.		DATE		SCALE	1:1		REV: V0	
 上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD						TITLE	LW1B-8.25-XXP-1Y-00A	
							LW1B-8.25-成品	