
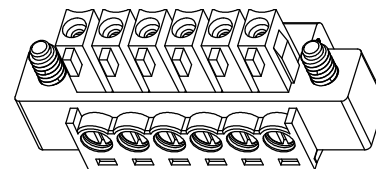




REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

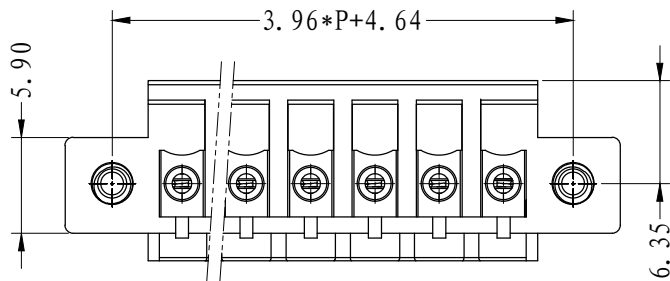

- NOTES:
1. Voltage Rating: 300V, Current Rating: 8A
 2. PITCH: 3.96mm
 3. Insulation Withstands Voltage: AC2500V/min
 4. Using Temperature Range:-40° C - +105° C
 5. Suitable Electric Wire: 28-16 AWG
 6. Screw Torque Value: 0.2Nm

技术要求:

1. 额定电压：300V，额定电流：8A
2. 间距：3.96mm
3. 耐电压值：AC2500V/min
4. 使用条件：-40° - +105°
5. 适用线规：28-16 AWG
6. 螺丝扭矩：0.2Nm

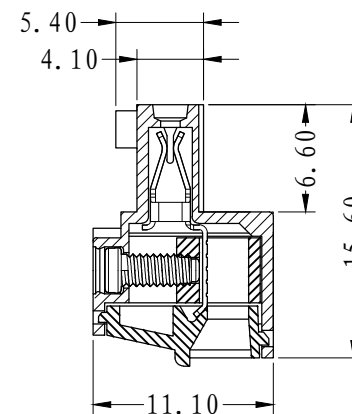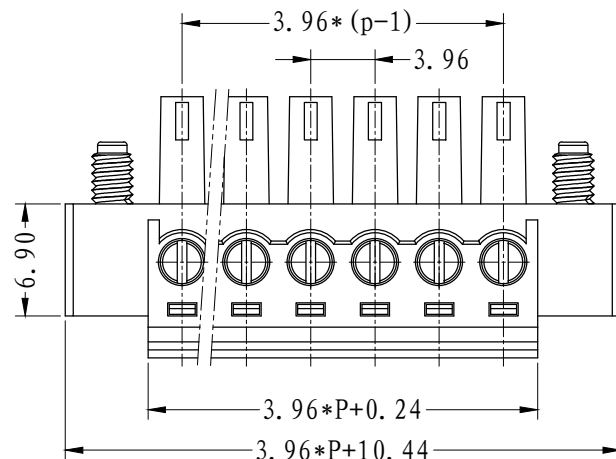

	pitch dimension			Naminal dimension					—
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LC1-耳朵螺丝		SP0YA255301V		2	碳钢	三价铬钝化彩锌
5	LC1-3.81-螺丝		SP0YA204801V		P	碳钢	三价铬钝化彩锌
4	LC1-3.81-铜方块		F1A0BLC3813V		P	黄铜	镀镍
3	LC1-3.81-夹子		1002B00010V		P	磷青铜	镀镍
2	LC1-3.96-盖子		1048C0YXXAV		1	PA66-V0	
1	LC1M-3.96-本体		1048M0YXXAV		1	PA66-V0	
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES
DES.	陈明珠	DATE	24/01/04	UNITS	MM		SHEET
CHK.	张华丰	DATE	24/01/04	SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1		
 上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD						TITLE	LC1M-3.96-XXP-1Y-00A
							LC1M-3.96-成品