

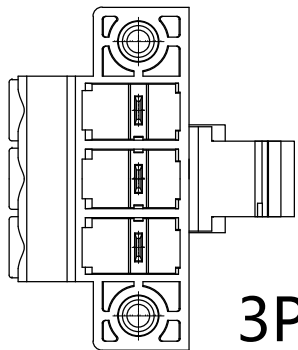


2P



3P



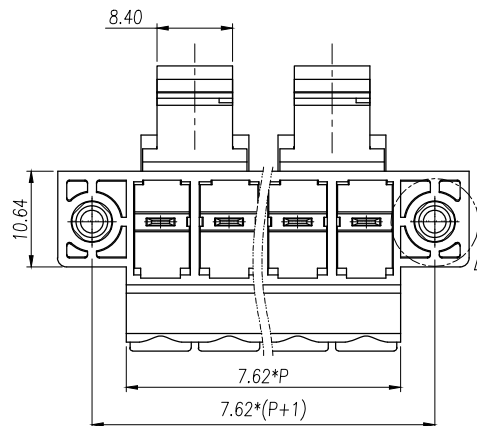


NOTES:

- 1.Voltage Rating: 380V, Current Rating: 32A
- 2.PITCH: 7.62mm
- 3.Insulation Withstands Voltage: AC2500V/min
- 4.Using Temperature Range:-40℃~+105℃
- 5.Suitable Electric Wire: 24-10 AWG
- 6.Screw Torque Value: 0.5N.m

技术要求:

- 1.额定电压: 380V, 额定电流: 32A
- 2.间距: 7.62mm
- 3.耐电压值: AC2500V/min
- 4.使用条件: -40° - +105°
- 5.适用线规: 24-10 AWG
- 6.螺丝扭矩: 0.5N.m

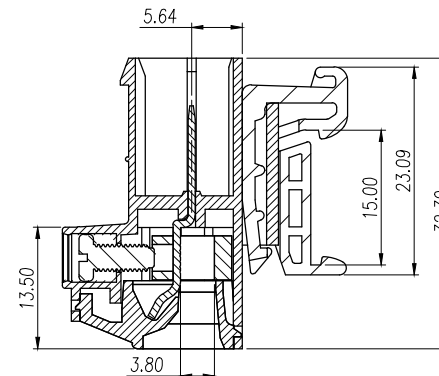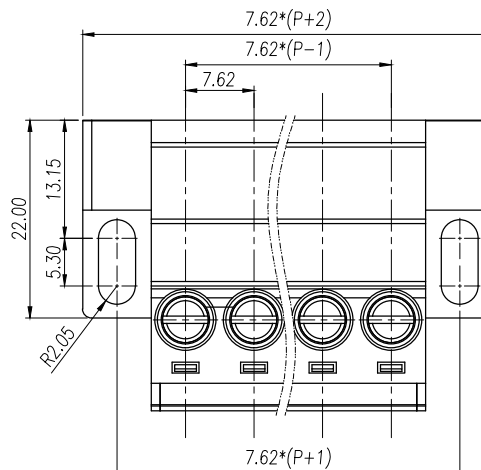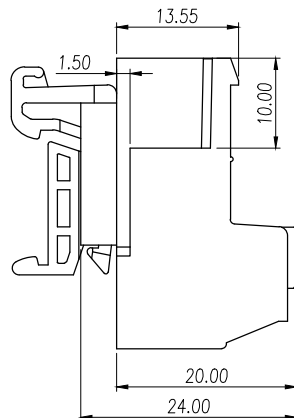

	pitch dimension			Naminal dimension					— ◇ ⌒
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	LC15-5.08-脚		1067T4001AV		1-2	PA66-V0		
6	LZ1HM-7.62耳朵螺母		SM00B300000V		2	黄铜		
5	M3*6.6一字平头螺丝		SP0YA306601V		P	碳钢	三价铬钝化彩锌	
4	UDK4-铜方块		F1C0BLC1H03V		P	黄铜	镀镍	
3	LC10H-7.62-方针		1156B0001AV		P	紫铜	镀雾锡	
2	LC1H-7.62-盖板		1153C0YXXAV		1	PA66-V0		
1	LC10HUMG-7.62-主体		1159M0YXXAV		1	PA66-V0		
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES	
DES.	CMZ	DATE	2024/08/27	UNITS	MM	THIRD ANGLE PROJECTION	SHEET	
CHK.		DATE		SIZE	A4		1 of 1	
APP.		DATE		SCALE	1:1		DWG NO.	SP-2-1159001
 上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD						TITLE	LC15HMG-7.62-XXP-1Y-00.	
							LC15HMG-7.62-成品	