
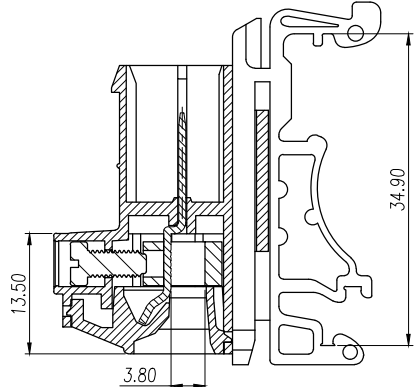
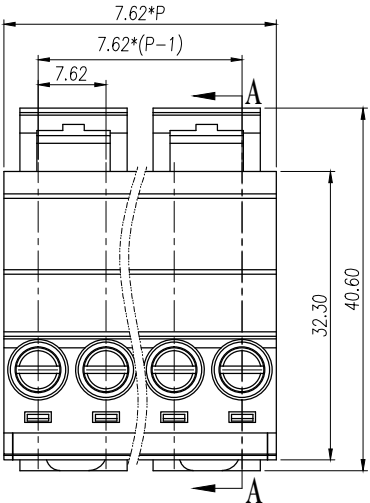
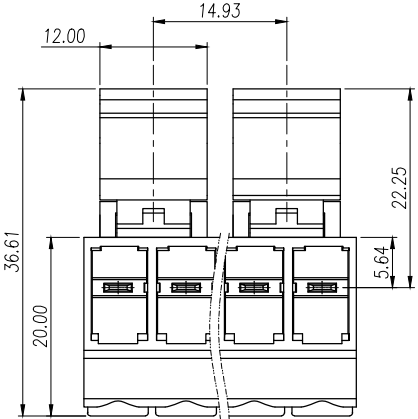
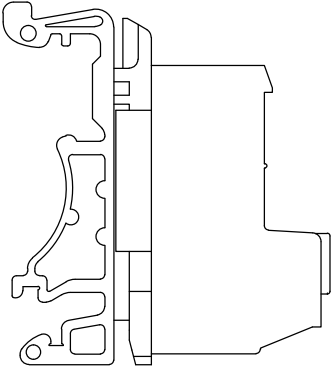


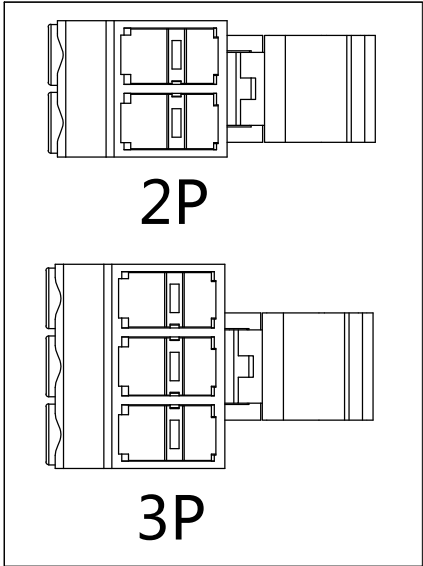

SECTION A-A

REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△	出版发行		

- NOTES:
- 1.Voltage Rating: 380V, Current Rating: 32A
 - 2.PITCH: 7.62mm
 - 3.Insulation Withstands Voltage: AC2500V/min
 - 4.Using Temperature Range:-40℃~+105℃
 - 5.Suitable Electric Wire: 24-10 AWG
 - 6.Screw Torque Value: 0.5N.m
- 技术要求:
- 1.额定电压: 380V, 额定电流: 32A
 - 2.间距: 7.62mm
 - 3.耐受电压: AC2500V/min
 - 4.使用条件: -40° ~ +105°
 - 5.适用线规: 24-10 AWG
 - 6.螺丝扭矩: 0.5N.m

	pitch dimension			Naminal dimension					— □ ○
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LC16-脚	1045T0Y01AV	1-2	PA66-V0				
5	M3*6.6一字平头螺丝	SP0YA306601V	P	碳钢	三价铬钝化彩锌			
4	UDK4-铜方块	F1C0BLC1H03V	P	黄铜	镀镍			
3	LC10H-7.62-方针	1156B0001AV	P	紫铜	镀雾锡			
2	LC1H-7.62-盖板	1153C0YXXAV	1	PA66-V0				
1	LC10HU-7.62-主体	1159A0YXXAV	1	PA66-V0				
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES	
DES.	CMZ	DATE	2024/08/27	UNITS	MM	THIRD ANGLE PROJECTION		SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-1159003	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD						TITLE		LC16H-7.62-XXP-1Y-00A
								LC16H-7.62-成品