


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
△	出版发行		

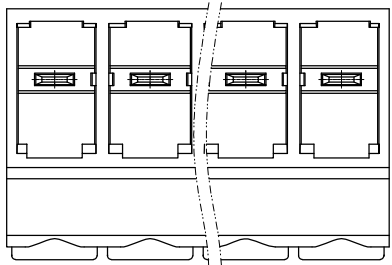


NOTES:

- 1.Voltage Rating: 380V, Current Rating: 32A
- 2.PITCH: 7.62mm
- 3.Insulation Withstands Voltage: AC2500V/min
- 4.Using Temperature Range: -40℃~+105℃
- 5.Suitable Electric Wire: 24-10 AWG
- 6.Screw Torque Value: 0.5N.m

技术要求:

1. 额定电压: 380V, 额定电流: 32A
2. 间距: 7.62mm
3. 耐电压值: AC2500V/min
4. 使用条件: -40° - +105°
5. 适用线规: 24-10 AWG
6. 螺丝扭矩: 0.5N.m

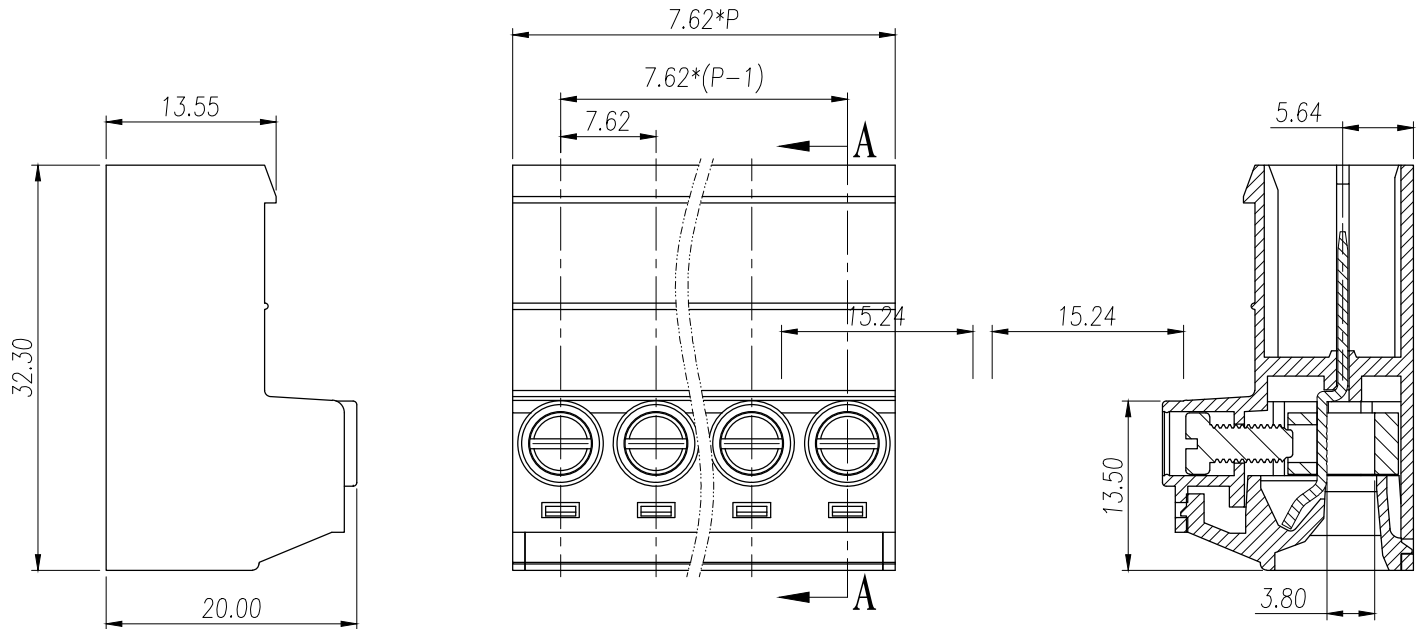

SECTION A-A

	pitch dimension			Naminl dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	M3*6.6一字平头螺丝	SP0YA306601V	P	碳钢	三价铬钝化彩锌
4	UDK4-铜方块	F1C0BLC1H03V	P	黄铜	镀镍
3	LC10H-7.62-方针	1156B0001AV	P	紫铜	镀雾锡
2	LC10H-7.62-盖板	1153C0YXXAV	1	PA66-V0	
1	LC10H-7.62-主体	1156A0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	CMZ	DATE 2024/08/27	UNITS MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4		1 of 1
APP.		DATE	SCALE 1:1	DWG NO. SP-2-1156001	REV:V0
 上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD				TITLE	LC10H-7.62-XXP-1Y-00A
					LC10H-7.62-成品