REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

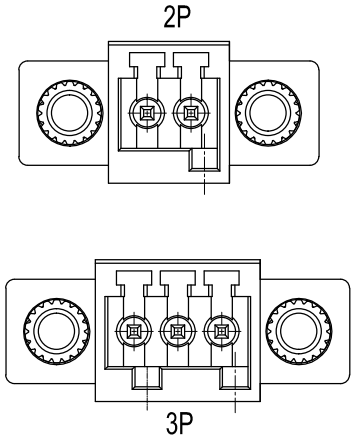

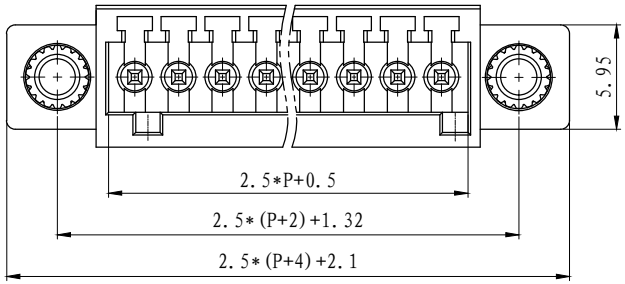

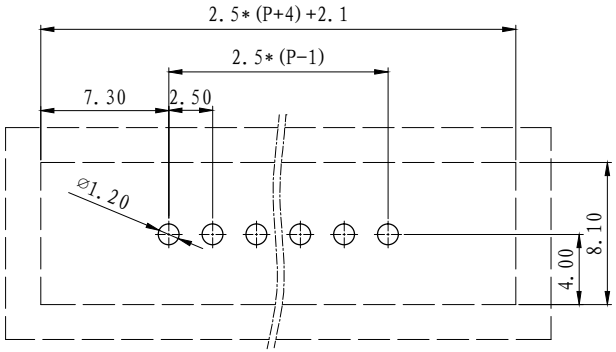

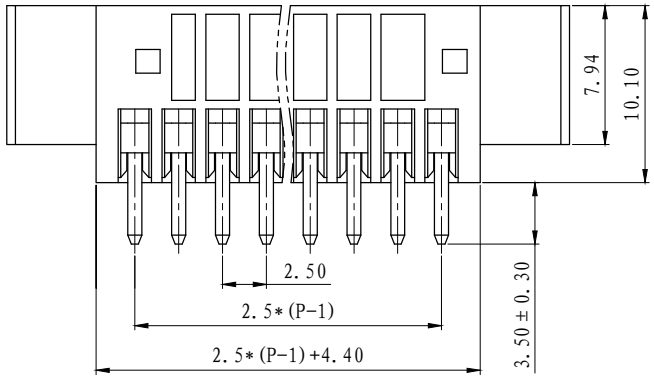

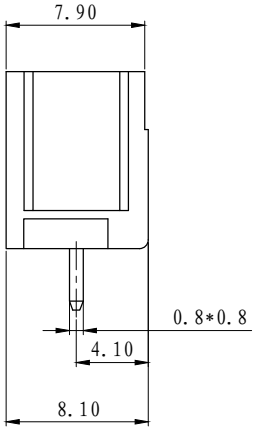

NOTES:
Pitch : 2.5mm
Rated Voltage : 150V
Rated Current : 4 A
Withstand Voltage :
AC2000V for 1 minute
Using Temperature Range :
- 40℃ ~ + 105℃

技术要求:
间距: 2.5mm
额定电压: 150V
额定电流: 4A
耐电压值: AC2000V/min
使用条件: -40℃~+105℃

	pitch dimension			Naminal dimension					
variable range	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LZ1-耳朵螺母	SM00B250000V	2	黄铜		
2	LZ1-3.81-直针四周带齿	1003B0005AV	P	黄铜	镀锡	
1	LZ1M-2.5-主体	1037M0YXXAV	1	PA66		
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	

DES.	陈明珠	DATE	2024-06-05	UNITS	mm	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO. SP-1-1037A02	REV: V0

上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD

TITLE: LZ1VM-2.5-XXP-1Y-00A
LZ1VM-2.5成品