





REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

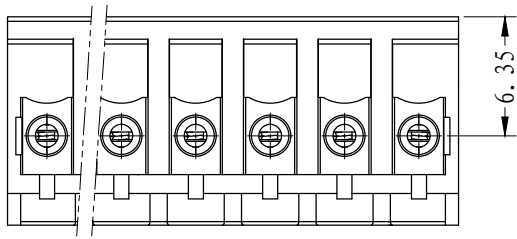

- NOTES:
- 1. Voltage Rating: 300V, Current Rating: 8A
 - 2. PITCH: 3.96mm
 - 3. Insulation Withstands Voltage: AC2500V/min
 - 4. Using Temperature Range:-40° C - +105° C
 - 5. Suitable Electric Wire: 28-16 AWG
 - 6. Screw Torque Value: 0.2Nm

技术要求:

- 1. 额定电压: 300V, 额定电流: 8A
- 2. 间距: 3.96mm
- 3. 耐电压值: AC2500V/min
- 4. 使用条件: -40° - +105°
- 5. 适用线规: 28-16 AWG
- 6. 螺丝扭矩: 0.2Nm

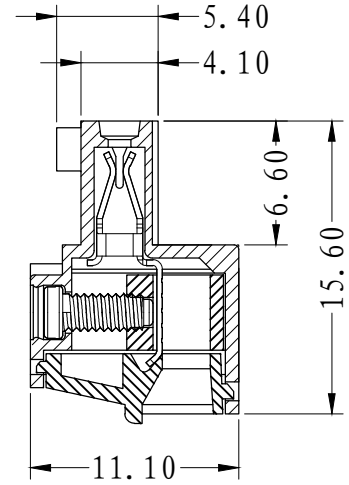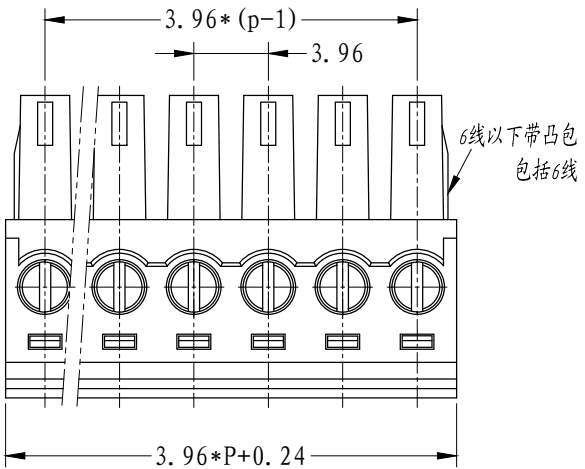

	pitch dimension			Nominal dimension					— —
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LC1-3.81-螺丝	SP0YA204801V	P	碳钢	三价铬钝化彩锌
4	LC1-3.81-铜方块	F1A0BLC3813V	P	黄铜	镀镍
3	LC1-3.81-夹子	1002B00010V	P	磷青铜	镀镍
2	LC1-3.96-盖子	1048C0YXXAV	1	PA66-V0	
1	LC1-3.96-本体	1048A0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	陈明珠	DATE 24/01/04	UNITS MM	THIRD ANGLE PROJECTION	SHEET
CHK.	张华丰	DATE 24/01/04	SIZE A4		1 of 1
APP.		DATE	SCALE 1:1	DWG NO. SP-2-1048001	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD				TITLE	LC1-3.96-XXP-1Y-00A LC1-3.96-成品