





REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

技术要求:

间距: 7.62mm
额定电压: 300V
额定电流: 15A
耐电压值: AC2500V/min
绝缘阻抗: 5MQ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~14 AWG
螺丝扭矩: 0.5Nm

NOTES:

Pitch : 7.62mm
Rated Voltage : 300V
Rated Current : 15 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
5MQ / DC500V
Using Temperature Range :
- 40℃ ~ + 130℃
Wire range : 22~14 AWG
Screw Torque Value : 0.5Nm

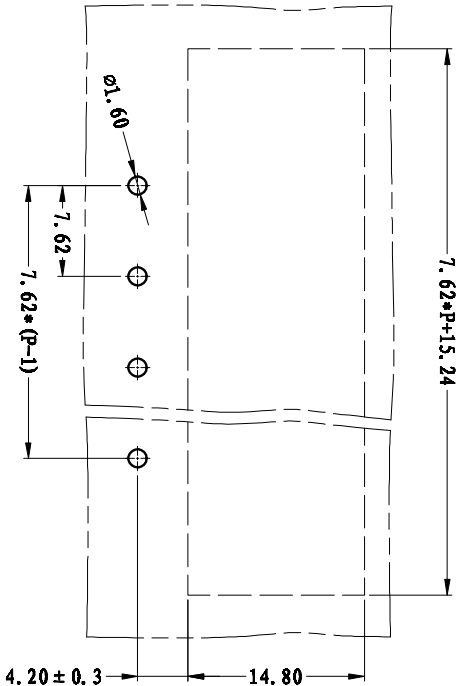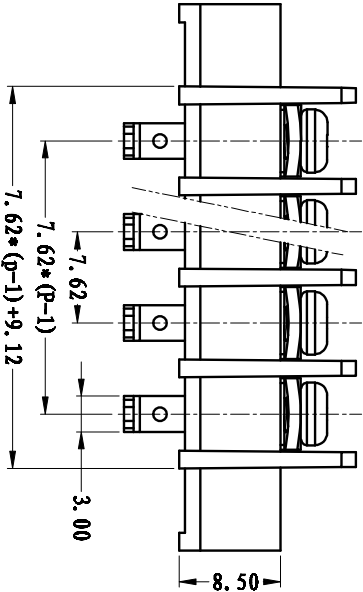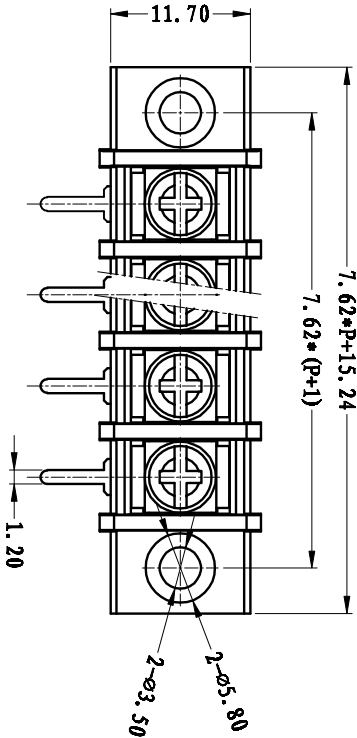

	pitch dimension			Nominal dimension					
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	6	10	24	30	60	100	150		— □ ()
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M3*6-6*6	SQFFA306023V	P	碳钢	三防规格化彩锌
2	L7MR-7.62-焊脚	5010B0004AY	P	黄铜	镀锡层
1	L7MR-7.62-主体	5010M07XXAY	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ACTIVE	DATE	11-05-10	UNITS	MM
CM.	DATE	DATE	SIZE	A4	THIRD ANGLE PROJECTION
APP.	DATE	DATE	SCALE	1:1	DWG NO. SP-2-5010008
上海聚捷电气有限公司			TITLE	L7MR-7.62-2P-1Y-00A	
Shanghai Klinter Electric Co., Ltd				L7MR-7.62-成品	