
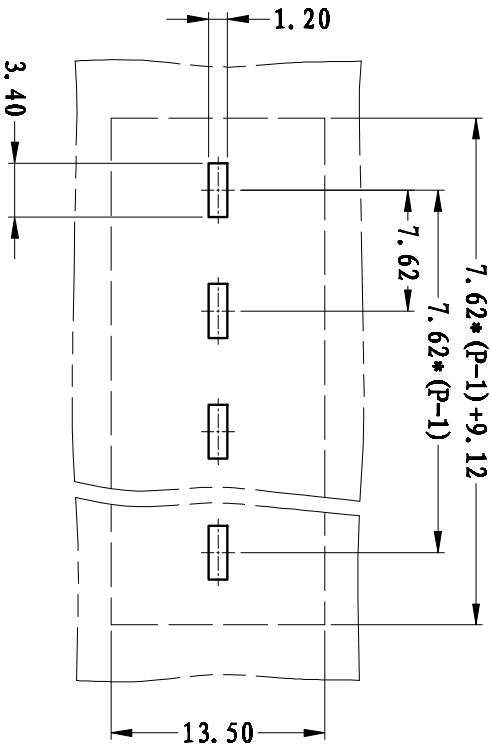
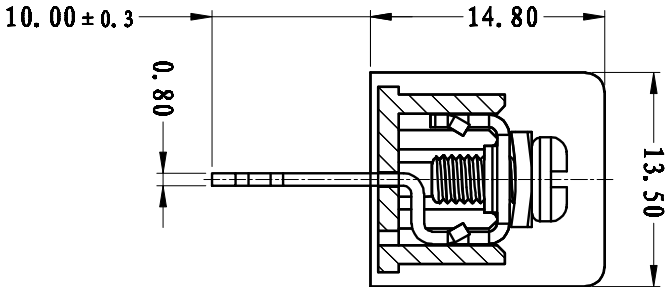


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

技术要求:

间距: 7.62mm
额定电压: 300V
额定电流: 15A
AC2500V for 1 minute
绝缘电阻: 5MΩ / DC500V
Using Temperature Range: -40℃ ~ +130℃
Wire range: 22~14 AWG
Screw Torque Value: 0.5Nm

间距: 7.62mm
额定电压: 300V
额定电流: 15A
AC2500V/min
绝缘电阻: 5MΩ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~14 AWG
螺丝扭矩: 0.5Nm

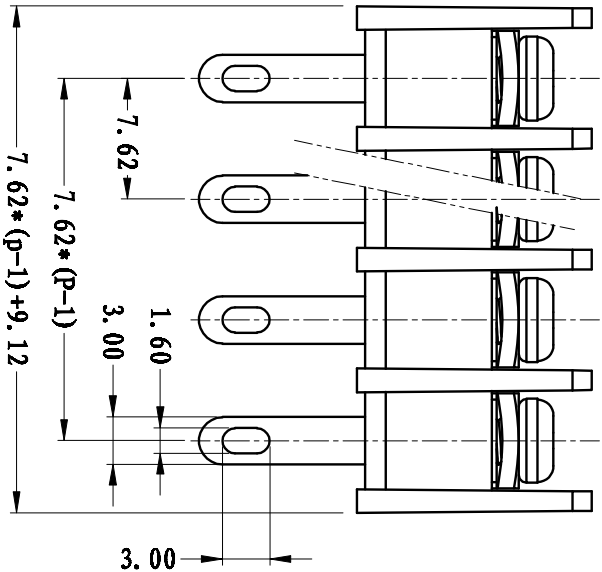

	pitch dimension				Nominal dimension				— □ ()
	over	over	over	over	over	over	over	over	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150 to 150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M3-6-6-6	SQFFA306023V	P	碳钢	三精特精化砂件
2	LWIQ-7.62-焊种	5010B9003AV	P	黄铜	鼓露场
1	LWI-7.62-主体	5010A07XAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ACTIVE	DATE	11-05-10	UNITS	MM
CHL.	DATE	SIZE	A4	SCALE	1: 1
APP.	DATE	SCALE	1: 1	DWG NO.	SP-2-5010003
上海联捷电气有限公司				TITLE	LWIQ-7.62-XP-1Y-00A
Shanghai Lianjie Electric Co., Ltd					LWIQ-7.62-成品