

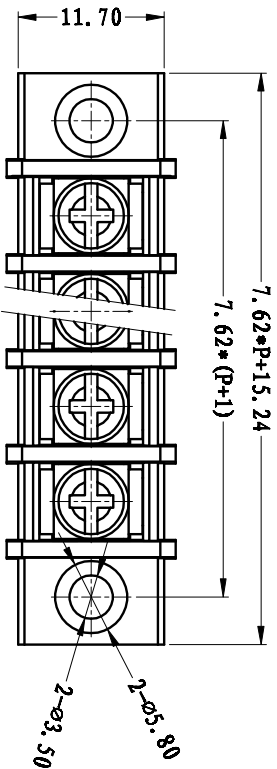
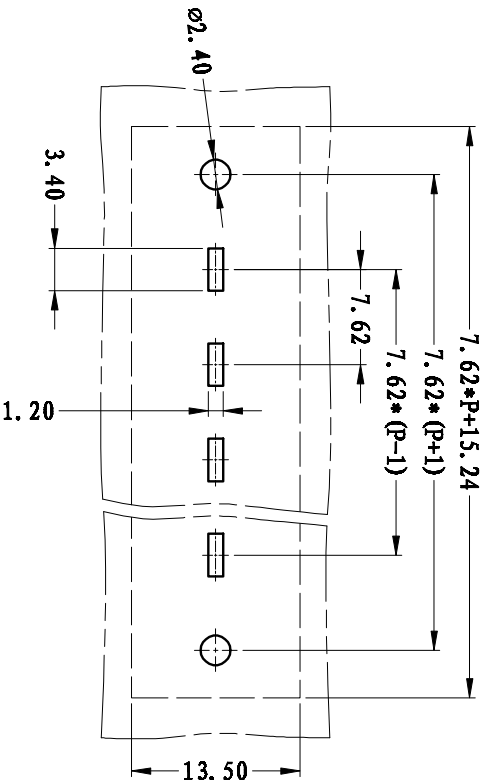


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

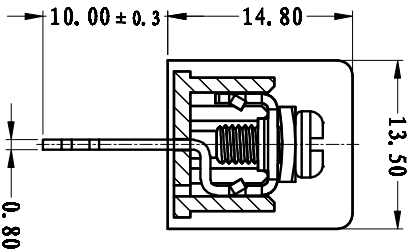

NOTES:
Pitch: 7.62mm
Rated Voltage: 300V
Rated Current: 15A
Withstand Voltage: AC2500V for 1 minute
Insulation Resistance: 5MΩ/DC500V
Using Temperature Range: -40℃ ~ +130℃
Wire range: 22~14 AWG
Screw Torque Value: 0.5Nm

技术要求:
间距: 7.62mm
额定电压: 300V
额定电流: 15A
耐电压值: AC2500V/min
绝缘阻抗: 5MΩ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~14 AWG
螺丝扭矩: 0.5Nm

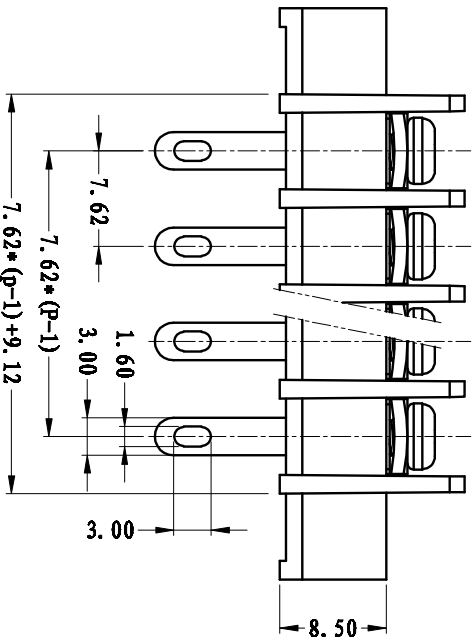

	pitch dimension			Nominal dimension						
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

3	M3*6-6	SUPPL306023V	P	碳钢	三价铬钝化彩锌
2	LTMQ-7.62-焊种	5010B0003AV	P	黄铜	镀雾锡
1	LTMQ-7.62-主体	5010M071AV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ACTIVE	DATE	11-05-10	UNITS	MM
CHK.	DATE	SIZE	A4	SCALE	1:1
APP.	DATE	SCALE	1:1	DWG NO.	SP-2-5010007
TITLE				LTMQ-7.62-TP-11-00A	REV: V0
SHEET				1 of 1	