


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		



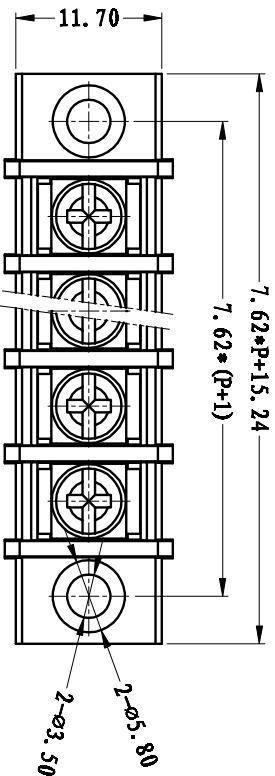


NOTES:

Pitch : 7.62mm
Rated Voltage : 300V
Rated Current : 15 A
Withstand Voltage : AC2500V for 1 minute
Insulation Resistance : 500MΩ / DC500V
Using Temperature Range : -40℃ ~ +130℃
Wire range : 22~14 AWG
Screw Torque Value : 0.5Nm

技术要求:

间距: 7.62mm
额定电压: 300V
额定电流: 15A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~14 AWG
螺丝扭矩: 0.5Nm

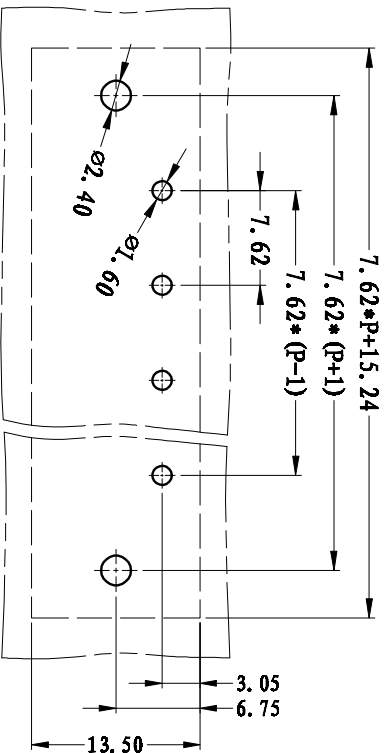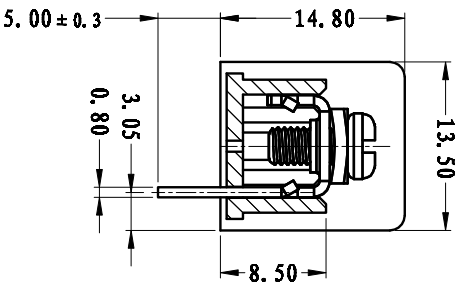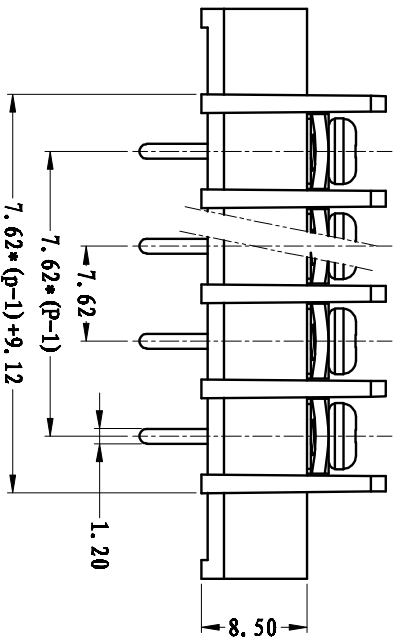

	pitch dimension			Nominal dimension					— □ (
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

3	U3-6-6-6	SQPT1306023V	P	碳钢	三价铬钝化彩锌
2	LTHD-7.62-异形	5010000021V	P	青铜	镀锡层
1	LTHD-7.62-主体	501000011AV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ACTIVE	DATE	11-05-10	UNITS	MM
CHL.	DATE	SIZE	A4		
APP.	DATE	SCALE	1:1	DWG NO.	SR-2-5010006
				TITLE	LTHD-7.62-XP-11-00A
					LTHD-7.62-成品



上海联捷电气有限公司
Shanghai Minder Electric Co., Ltd