

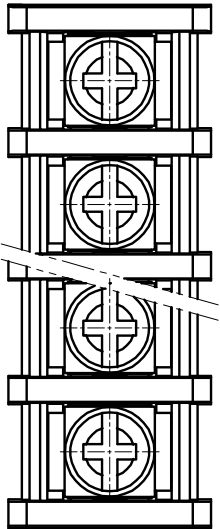
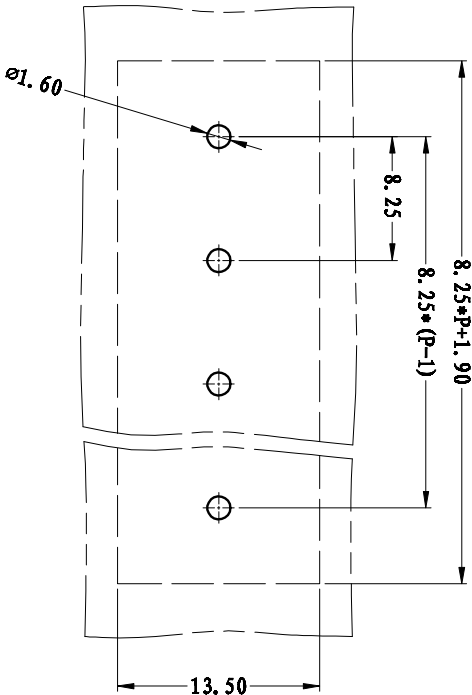


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△0	初版发行		

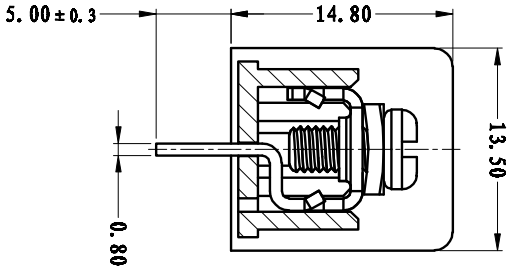

NOTES:
Pitch: 8.25mm
Rated Voltage: 300V
Rated Current: 20 A
Withstand Voltage: AC2500V for 1 minute
Insulation Resistance: 1000MΩ/DC500V
Using Temperature Range: -40℃ ~ +130℃
Wire range: 22~12 AWG
Screw Torque Value: 0.5Nm

技术要求:
间距: 8.25mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/1min
绝缘阻抗: 1000MΩ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 0.5Nm

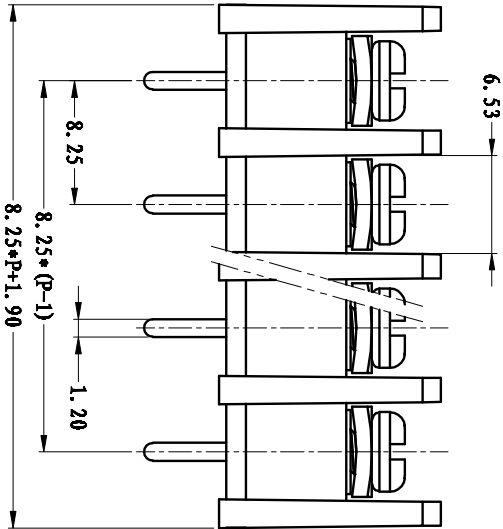

	pitch dimension			Nominal dimension					— — □ (
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
								0.05/10	

3	M3-6-6-6	SQFFA306023V	P	碳钢	三价铬钝化彩锌
2	LWIC-7.62-焊种	5010B9001AV	P	黄铜	镀雾锡
1	LWIC-8.25-本体	5014A07XAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ACTIVE DATE	11-05-10	UNITS	MM	THIRD ANGLE PROJECTION
CHG.	DATE		SIZE	A4	SHEET
APP.	DATE		SCALE	1:1	1 of 1
				DWG NO.	SP-2-5014001
				REV.	V0
				TITLE	LWIC-8.25-XP-11-00A
					LWIC-8.25-成品