
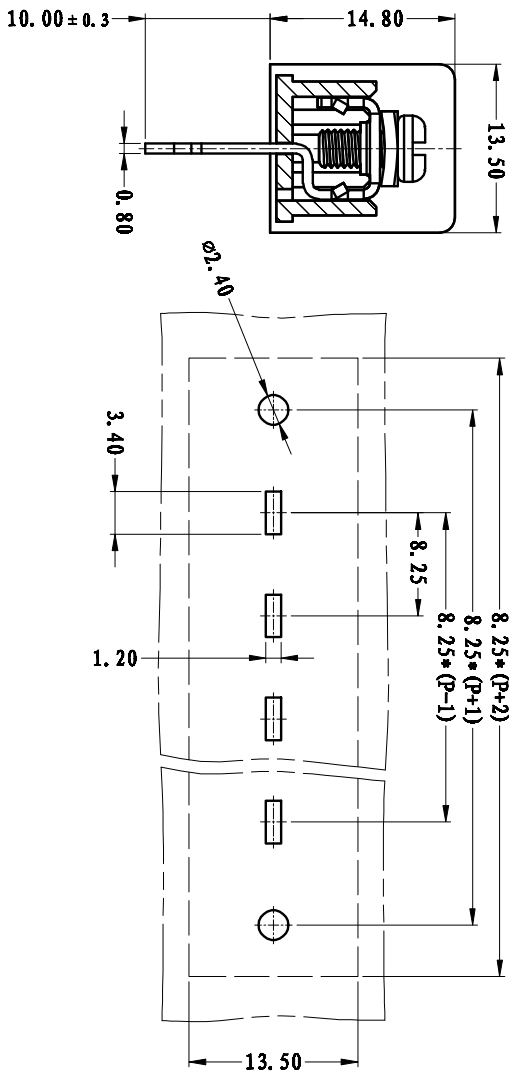
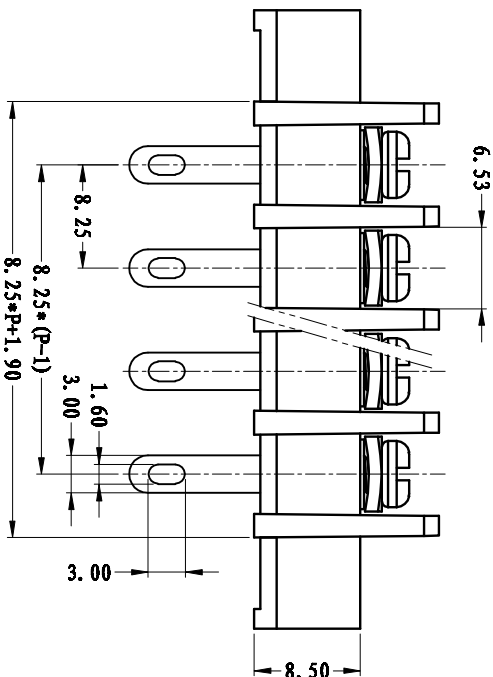


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

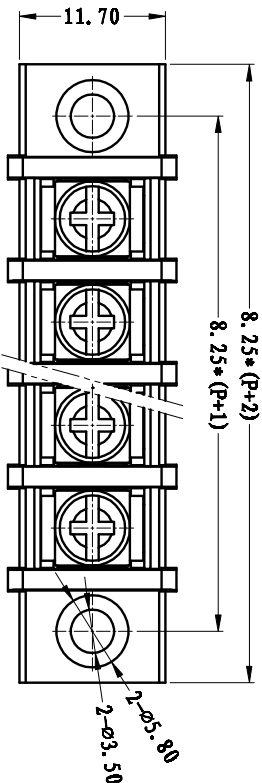

NOTES:

Pitch : 8.25mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
1000MΩ / DC500V
Using Temperature Range :
-40℃ ~ +130℃
Wire range : 22~12 AWG
Screw Torque Value : 0.5Nm

技术要求:

间距: 8.25mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 1000MΩ/DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 0.5Nm

	pitch dimension			Nominal dimension					
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	6	10	24	30	60	100	150		()
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M3-6-6-6	SQFFA306023V	P	碳钢	三价铬钝化彩锌
2	LTMQ-7.62-焊种	5010B0003AV	P	黄铜	镀雾锡
1	LTMQ-8.25-主体	5014M07XAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	DATE	11-05-10	UNITS	MM	THIRD ANGLE PROJECTION
CHK.	DATE		SIZE	A4	SHEET
APP.	DATE		SCALE	1:1	1 of 1
				DWG NO.	SP-2-5014007
				REV:	V0
				TITLE	LTMQ-8.25-XP-1Y-00A
					LTMQ-8.25-成品



上海联捷电气有限公司
Shanghai Bihador Electric Co., Ltd