


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
Δ	初版发行		

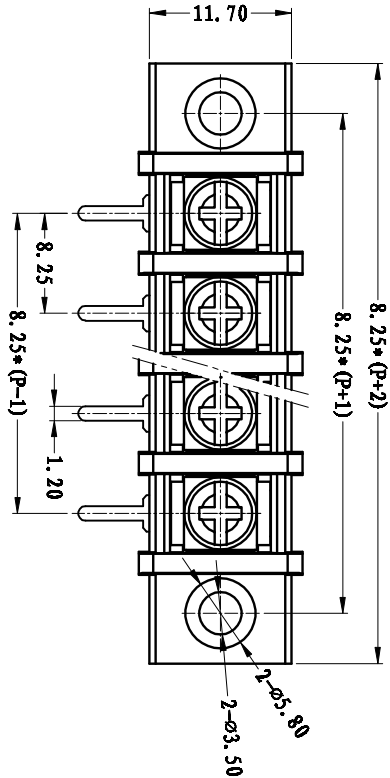

NOTES:

Pitch : 8.25mm

Rated Voltage : 300V

Rated Current : 20 A

Withstand Voltage : AC2500V for 1 minute

Insulation Resistance : 1000MΩ / DC500V

Using Temperature Range : -40℃ ~ +130℃

Wire range : 22~12 AWG

Screw Torque Value : 0.5Nm

技术要求:

间距: 8.25mm

额定电压: 300V

额定电流: 20A



耐电压值: AC2500V/min

绝缘阻抗: 1000MΩ/DC500V

使用条件: -40℃~+130℃

适用线规: 22~12 AWG

螺丝扭矩: 0.5Nm

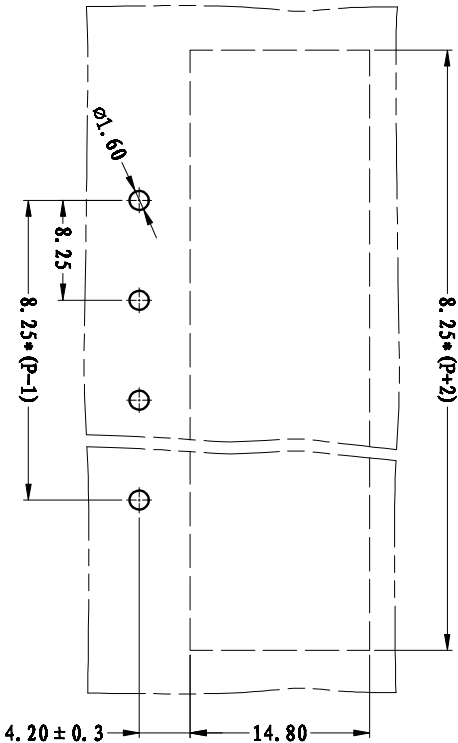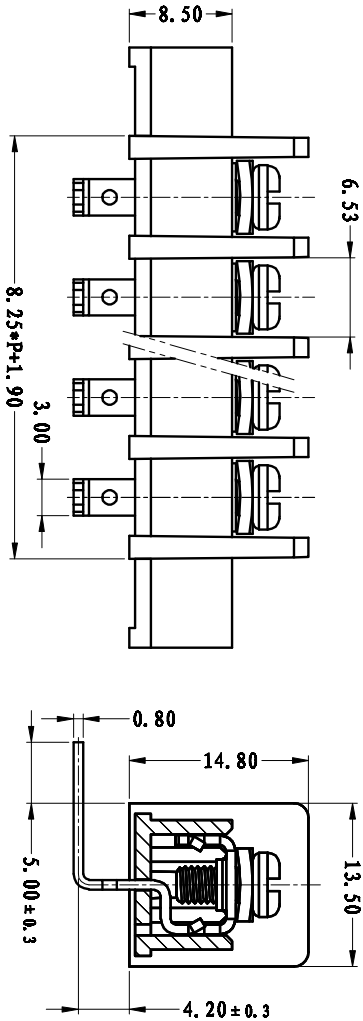

	pitch dimension			Nominal dimension						
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150 to 200		
variable range	6	10	24	30	60	100	150	200		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

3	M3*6-6*6	SQFFA306023V	P	碳钢	三价钝化彩锌
2	LWM-7.62-母座	5010B0004AY	P	黄铜	镀黑锡
1	LWM-8.25-主体	5014M07XAY	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ARKINE	DATE	11-05-10	MM	THIRD ANGLE PROJECTION
CEL	DATE	SIZE	A4		SHEET
APP.	DATE	SCALE	1:1	DWG NO.	1 of 1
				SP-2-5014008	REV: Y0
 上海联捷电气有限公司 Shanghai Minder Electric Co., Ltd.				TITLE	
				LWM-8.25-XP-1Y-00A	
				LWM-8.25-成品	



上海秉捷电气有限公司
Shanghai Binker Electric Co., Ltd