

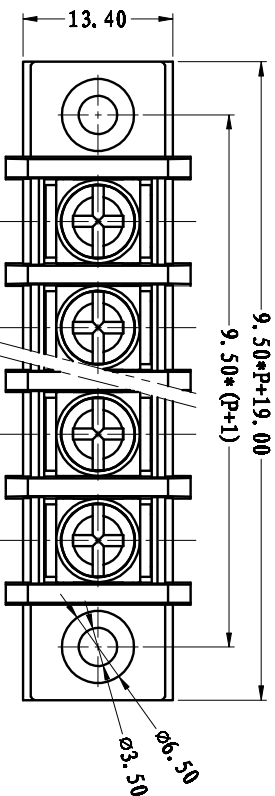
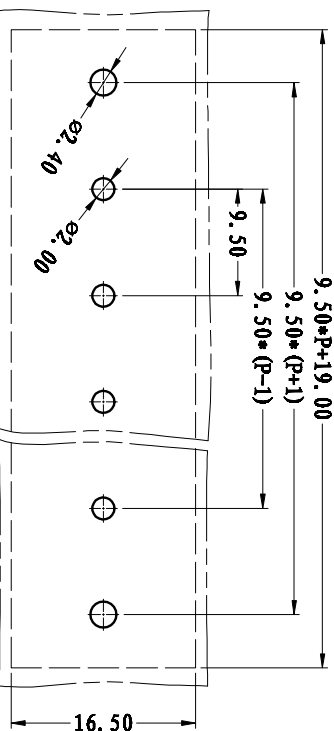


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

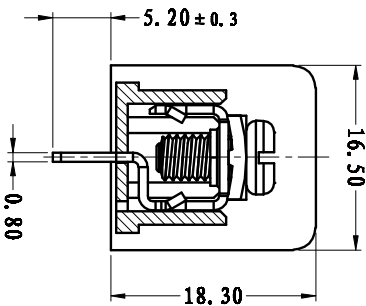

NOTES:
Pitch : 9.5mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
1000MΩ / DC500V
Using Temperature Range :
-40℃ ~ +130℃
Wire range : 22~12 AWG
Screw Torque Value : 1.2Nm

技术要求:
间距: 9.5mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 1000MΩ / DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 1.2Nm

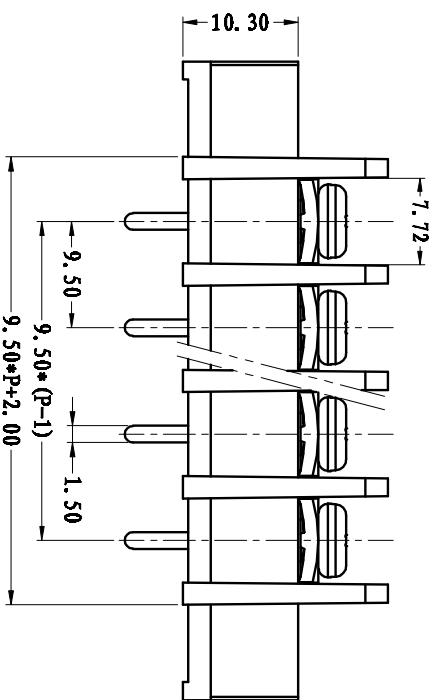

	Pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LTM-9.5-焊脚	500230001AY	P	黄铜	数量
2	M4*8-7.5*7.5	800FA408043Y	P	碳钢	三价铬钝化彩锌
1	LTM-9.5-本体	5002M07X1AY	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	AKKINE	DATE	2010/12/20	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-5002005
				TITLE	LTM-9.5-TP-11-00A
					LTM-9.5-成品