

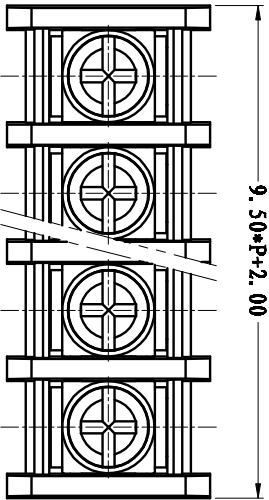
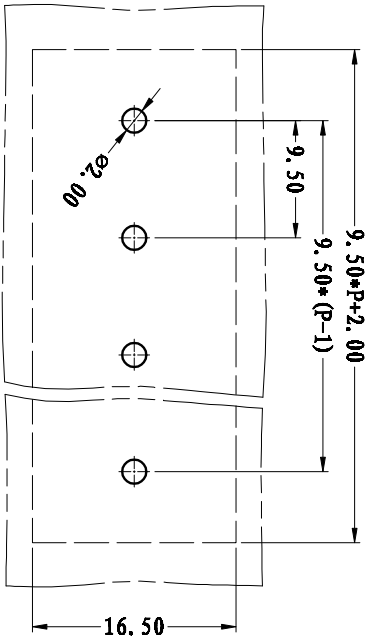


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
1	初版发行		

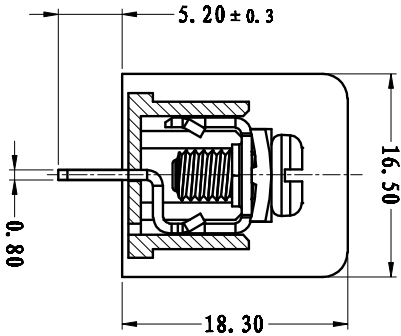

NOTES:
Pitch : 9.5mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
1000MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 130℃
Wire range : 22~12 AWG
Screw Torque Value : 1.2Nm

技术要求:
间距: 9.5mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 1000MΩ / DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 1.2Nm

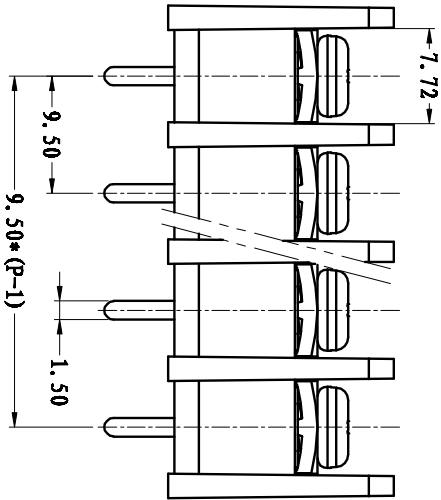

	Pitch dimension		Nominal dimension					— □ ()
	over	over	over	over	over	over	over	
variable range	0 to	6 to	10 to	0 to	30 to	60 to	100 to	150
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

3	LMI-C-9.5-焊脚	500230001AY	P	黄铜	鍍锡
2	M4*8-7.5*7.5	8007F4408M43Y	P	碳钢	三价铬钝化彩锌
1	LMI-9.5-本体	5002A007X1AY	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	AKKINE	DATE	2010/12/20	UNITS	MM
CHL.	DATE	SIZE	A4		
APP.	DATE	SCALE	1:1	DWG NO.	SP-2-5002001
上海联捷电气有限公司 Shanghai Hinder Electric Co.,LTD				TITLE	LMI-C-9.5-XP-11-00A
					LMI-C-9.5-成品