


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		



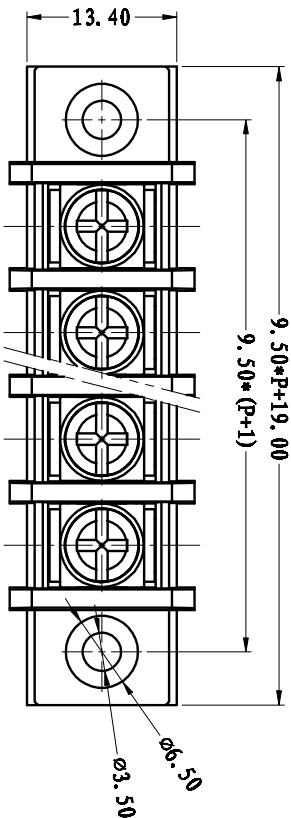


NOTES:

技术要求:

Pitch : 9.5mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage : AC2500V for 1 minute
Insulation Resistance : 1000MΩ / DC500V
Using Temperature Range : -40℃ ~ +130℃
Wire range : 22~12 AWG
Screw Torque Value : 1.2Nm

间距: 9.5mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 1000MΩ / DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 1.2Nm

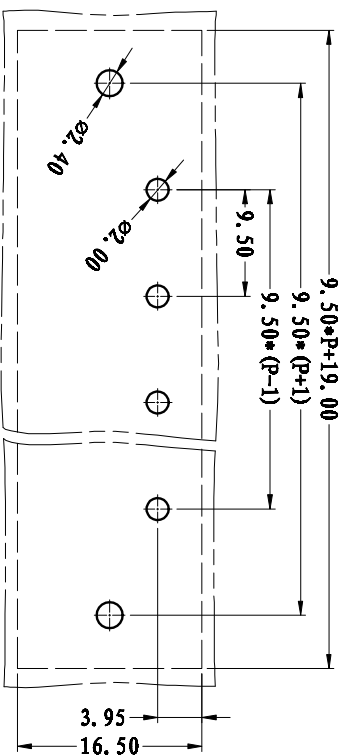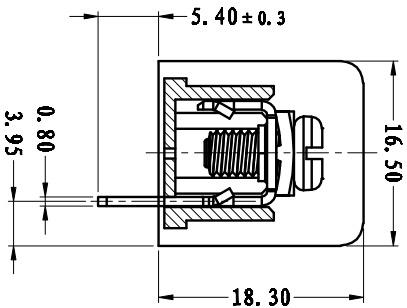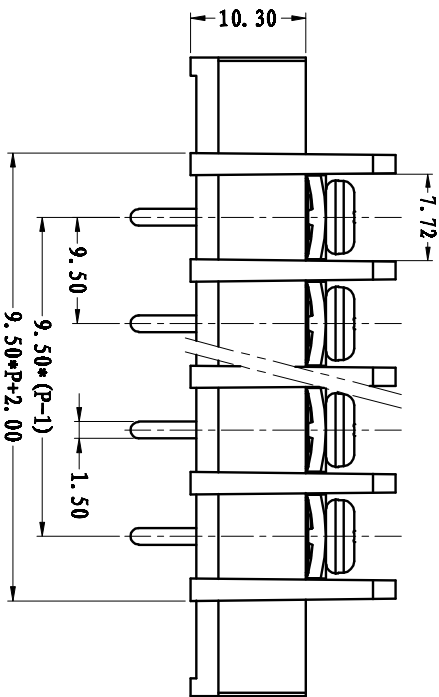

	Pitch dimension			Nominal dimension					— □ ()
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LTM-9.5-焊脚	500230002AV	P	黄铜	数量
2	M4-8-7.5*7.5	80PFA408043V	P	碳钢	三价铬钝化彩锌
1	LTM-9.5-本体	5002007XAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	AKKINE	DATE	2010/12/20	UNITS	MM
CHK.	DATE	SCALE	A4	SIZE	THIRD ANGLE PROJECTION
APP.	DATE	SCALE	1:1	DWG NO.	SP-2-5002006
上海联捷电气有限公司				TITLE	1 of 1
Shanghai Hinder Electric Co.,LTD				LTM-9.5-XTP-11-00A	REV: V0
				LTM-9.5-成品	