


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

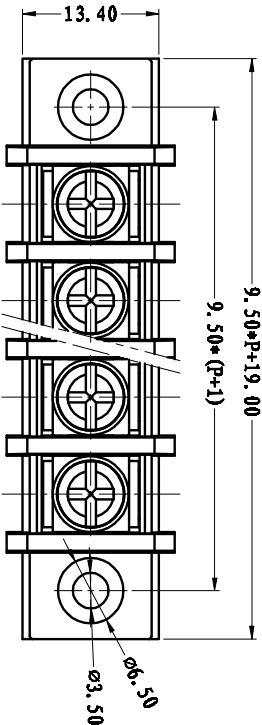

NOTES:

Pitch : 9.5mm

Rated Voltage : 300V

Rated Current : 20 A

Withstand Voltage : AC2500V for 1 minute

Insulation Resistance : 1000MΩ / DC500V

Using Temperature Range : -40℃ ~ +130℃

Wire range : 22~12 AWG

Screw Torque Value : 1.2Nm

技术要求:

间距: 9.5mm

额定电压: 300V

额定电流: 20A




耐电压值: AC2500V/min

绝缘阻抗: 1000MΩ / DC500V

使用条件: -40℃~+130℃

适用线规: 22~12 AWG

螺丝扭矩: 1.2Nm

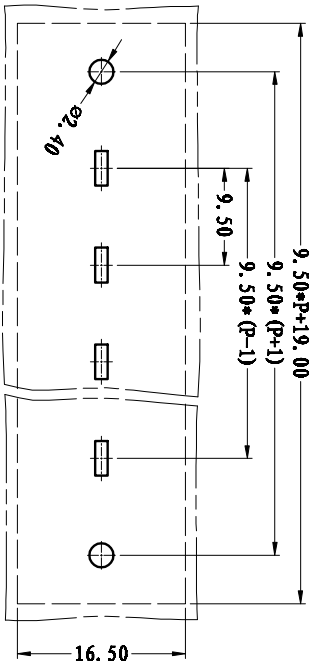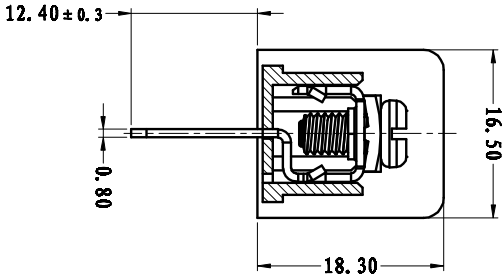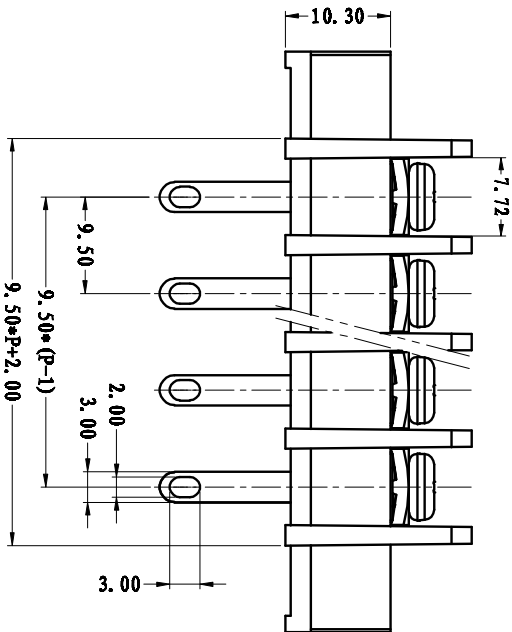

	Pitch dimension			Nominal dimension						
	over	over	over	over	over	over	over	over	over	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150			— □ ()
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

3	LTMQ-9.5-焊脚	500230003AV	P	黄铜	数量
2	M4*8-7.5*7.5	80PFA408043V	P	碳钢	三价铬钝化彩锌
1	LTMQ-9.5-本体	5002M07XAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	AKKIE	DATE	2010/12/20	UNITS	MM
CHK.	DATE	SIZE	A4		
APP.	DATE	SCALE	1:1	DWG NO.	SP-2-5002007
上海联捷电气有限公司				TITLE	LTMQ-9.5-XTP-11-00A
Shanghai Hinder Electric Co.,LTD					LTMQ-9.5-成品