
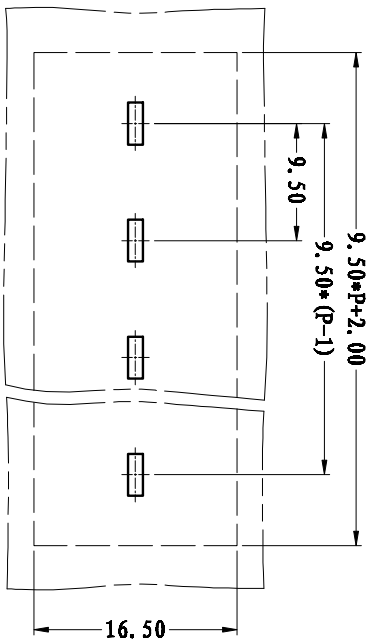
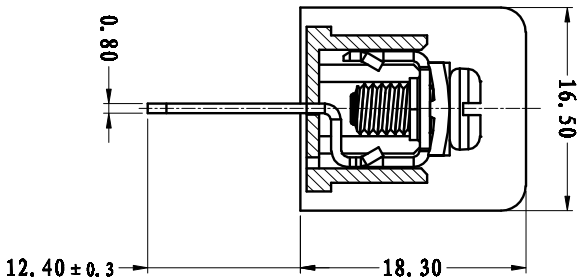
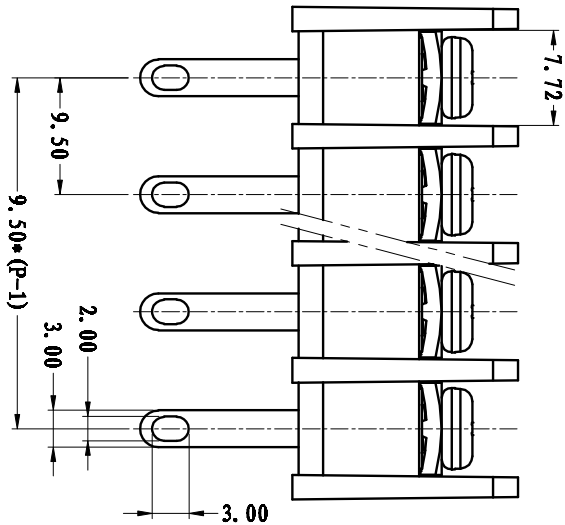


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

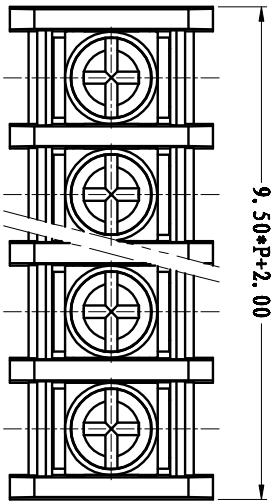

NOTES:

Pitch : 9.5mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
1000MΩ / DC500V
Using Temperature Range :
-40℃ ~ +130℃
Wire range : 22~12 AWG
Screw Torque Value : 1.2Nm

技术要求:

间距: 9.5mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 1000MΩ / DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 1.2Nm

	Pitch dimension		Nominal dimension					Tolerance
	over	over	over	over	over	over	over	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	
	6	10	24	30	60	100	150	
	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

3	LMIQ-9.5-焊脚	500230003AV	P	黄铜	镀锡层
2	M4*8-7.5*7.5	800FA408043V	P	碳钢	三价铬钝化彩锌
1	LMI-9.5-本体	5002A07XAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	AKKINE	DATE	2010/12/20	UNITS	MM
CHK.	DATE	SIZE	A4		
APP.	DATE	SCALE	1:1	DWG NO.	SP-2-5002003
上海联捷电气有限公司				TITLE	LMIQ-9.5-XP-11-00A
Shanghai Hinder Electric Co.,LTD					LMIQ-9.5-成品