


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

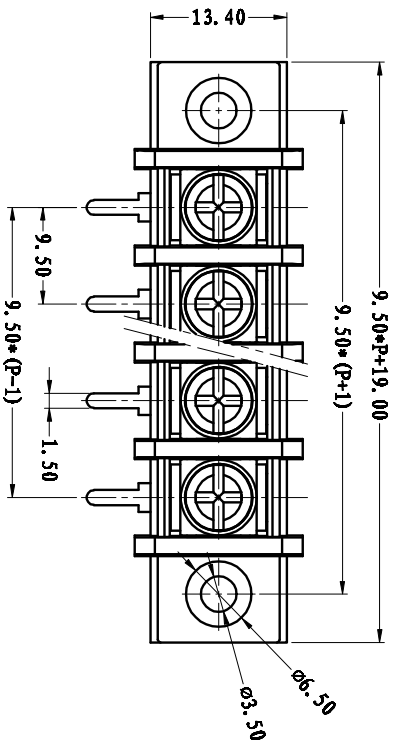

NOTES:

Pitch : 9.5mm

Rated Voltage : 300V

Rated Current : 20 A

Withstand Voltage : AC2500V for 1 minute

Insulation Resistance : 1000M Ω / DC500V

Using Temperature Range : -40℃ ~ +130℃

Wire range : 22~12 AWG

Screw Torque Value : 1.2Nm

技术要求:

间距: 9.5mm

额定电压: 300V

额定电流: 20A




耐电压值: AC2500V/min

绝缘阻抗: 1000M Ω / DC500V

使用条件: -40℃~+130℃

适用线规: 22~12 AWG

螺丝扭矩: 1.2Nm

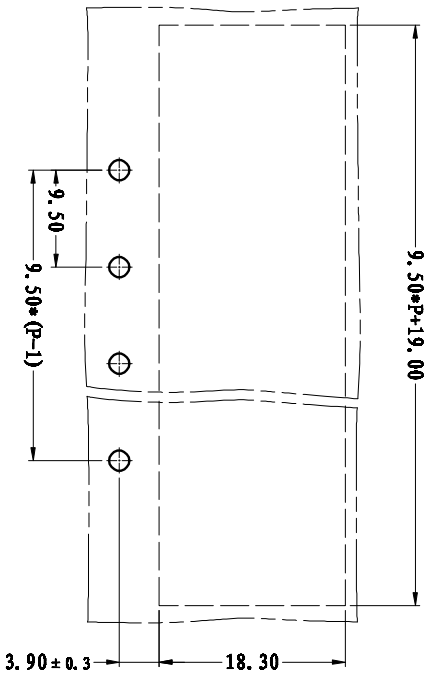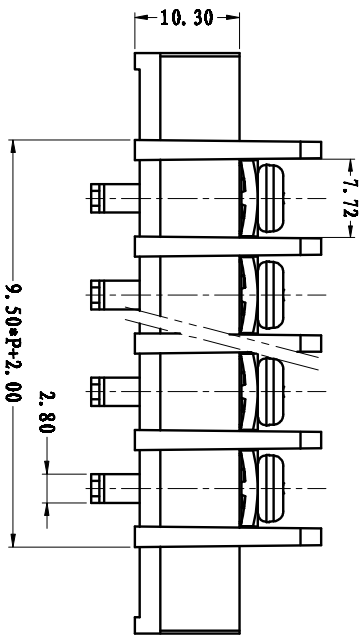

	Pitch dimension			Nominal dimension					
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
Tolerance	± 0.1	± 0.15	± 0.25	± 0.2	± 0.3	± 0.5	± 0.7	± 1.0	0.05/10

3	LTM-9.5-焊脚	500230004AY	P	黄铜	镀锡层
2	M4*8-7.5*7.5	800FA408043Y	P	碳钢	三价铬钝化彩锌
1	LTM-9.5-本体	500230073AY	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	AKKINE	DATE	2010/12/20	UNITS	MM
CHK.	DATE	SIZE	A4	THIRD ANGLE PROJECTION	SHEET
APP.	DATE	SCALE	1:1	DWG NO.	SP-2-5002008
上海联捷电气有限公司				TITLE	LTM-9.5-XTP-11-00A
Shanghai Hinder Electric Co.,LTD					LTM-9.5-成品