

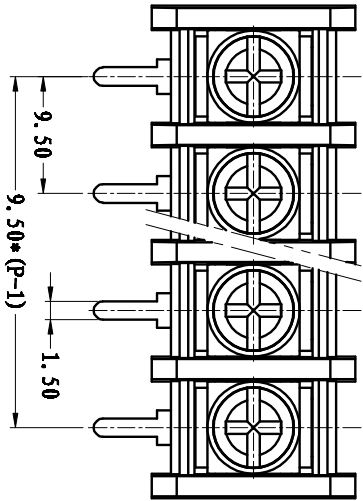
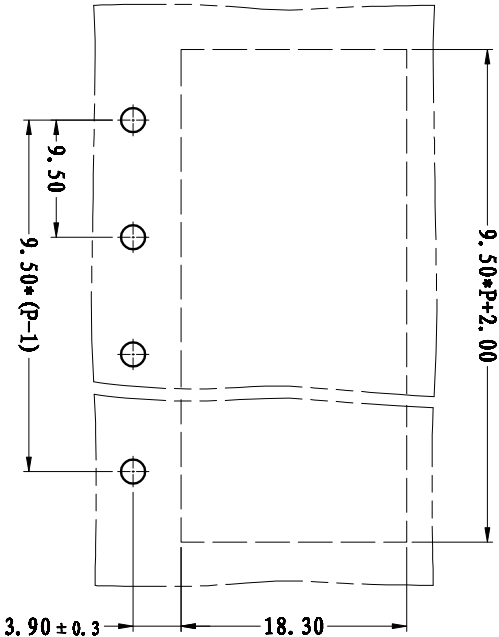


| REVISION RECORD |         |      |      |
|-----------------|---------|------|------|
| REV.            | CONTENT | MOD. | DATE |
| ①               | 初版发行    |      |      |

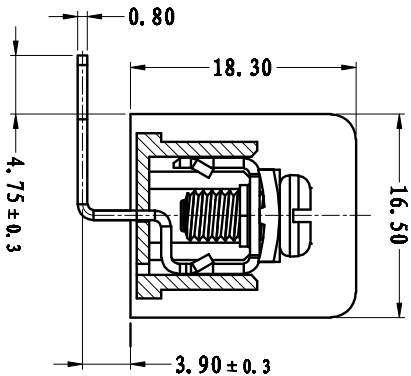

NOTES:  
Pitch : 9.5mm  
Rated Voltage : 300V  
Rated Current : 20 A  
Withstand Voltage :  
AC2500V for 1 minute  
Insulation Resistance :  
1000MQ / DC500V  
Using Temperature Range :  
- 40℃ ~ + 130℃  
Wire range : 22~12 AWG  
Screw Torque Value : 1.2Nm

技术要求:  
间距: 9.5mm  
额定电压: 300V  
额定电流: 20A  
耐电压值: AC2500V/min  
绝缘阻抗: 1000MQ / DC500V  
使用条件: -40℃~+130℃  
适用线规: 22~12 AWG  
螺丝扭矩: 1.2Nm

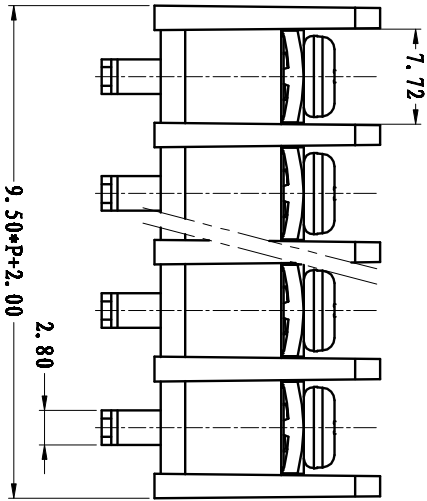

|           | Pitch dimension      |                       |                        |                       | Nominal dimension      |                         |                          |             |         | —<br>□<br>( ) |
|-----------|----------------------|-----------------------|------------------------|-----------------------|------------------------|-------------------------|--------------------------|-------------|---------|---------------|
|           | over<br>0<br>to<br>6 | over<br>6<br>to<br>10 | over<br>10<br>to<br>24 | over<br>0<br>to<br>30 | over<br>30<br>to<br>60 | over<br>60<br>to<br>100 | over<br>100<br>to<br>150 | over<br>150 |         |               |
| Tolerance | ±0.1                 | ±0.15                 | ±0.25                  | ±0.2                  | ±0.3                   | ±0.5                    | ±0.7                     | ±1.0        | 0.05/10 |               |

|                                                |              |              |            |                        |                   |
|------------------------------------------------|--------------|--------------|------------|------------------------|-------------------|
| 3                                              | LMI-9.5-焊脚   | 500230004AY  | P          | 黄铜                     | 镀锡层               |
| 2                                              | M4*8-7.5*7.5 | 80PFA408043Y | P          | 碳钢                     | 三价铬钝化彩锌           |
| 1                                              | LMI-9.5-本体   | 5002A07XAY   | 1          | PBT                    |                   |
| NO.                                            | NAME OF PART | NO. OF PART  | Q'TY       | MATERIAL               | NOTES             |
| DES.                                           | AKKINE       | DATE         | 2010/12/20 | UNITS                  | MM                |
| CHK.                                           | DATE         | SIZE         | A4         | THIRD ANGLE PROJECTION | SHEET             |
| APP.                                           | DATE         | SCALE        | 1:1        | DWG NO.                | SP-2-5002004      |
| 上海联捷电气有限公司<br>Shanghai Hinder Electric Co.,LTD |              |              |            | TITLE                  | LMI-9.5-XP-11-00A |
|                                                |              |              |            |                        | LMI-9.5-成品        |