
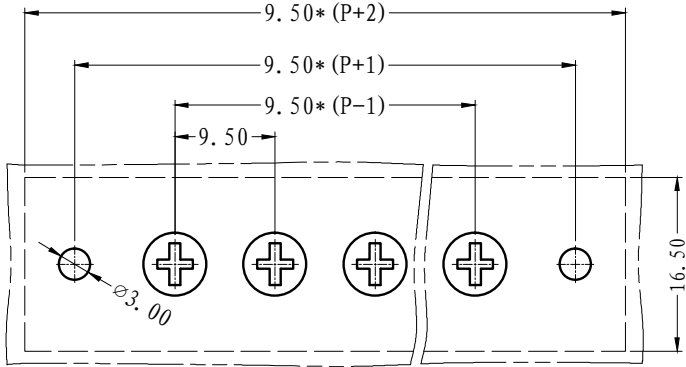
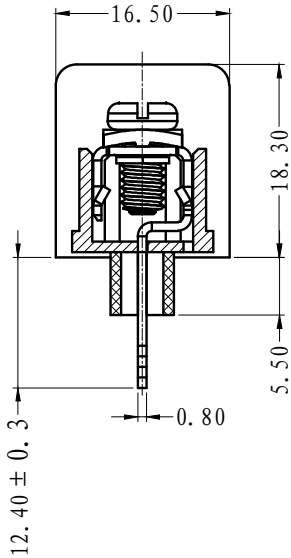
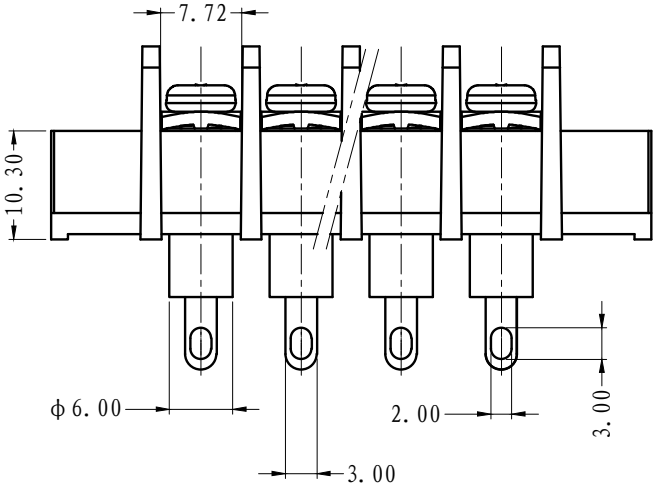


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

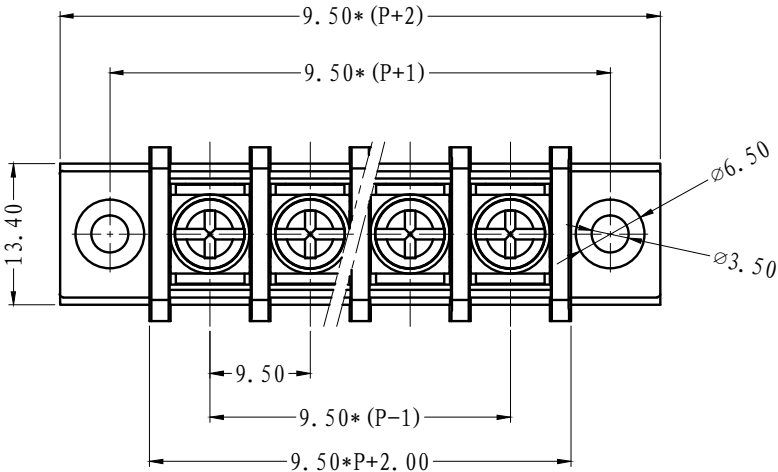

NOTES:

Pitch : 9.5mm
Rated Voltage : 300V
Rated Current : 20 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
1000MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 130℃
Wire range : 22~12 AWG
Screw Torque Value : 1.2Nm

技术要求:

间距: 9.5mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
绝缘阻抗: 1000MΩ / DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 1.2Nm

	Pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□ ○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LW-圆柱	5034A0Y01AV	P	PA66	
3	LW1Q-9.5-焊脚	5002B0003AV	P	黄铜	镀雾锡
2	M4*8-7.5*7.5	SQFFA408041V	P	碳钢	三价铬钝化彩锌
1	LW1M-9.5-本体	5002M0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	ZGC	DATE 2020/08/26	UNITS MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE	SIZE A4	⊕	1 of 1
APP.		DATE	SCALE 1:1	DWG NO. SP-2-5002017	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LW1MQJ-9.5-XXP-1Y-00A LW1MQJ-9.5-成品