
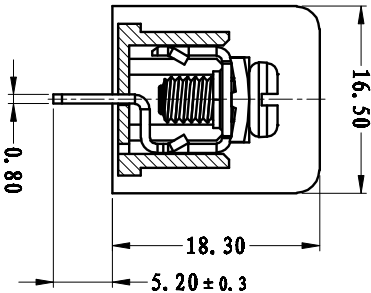
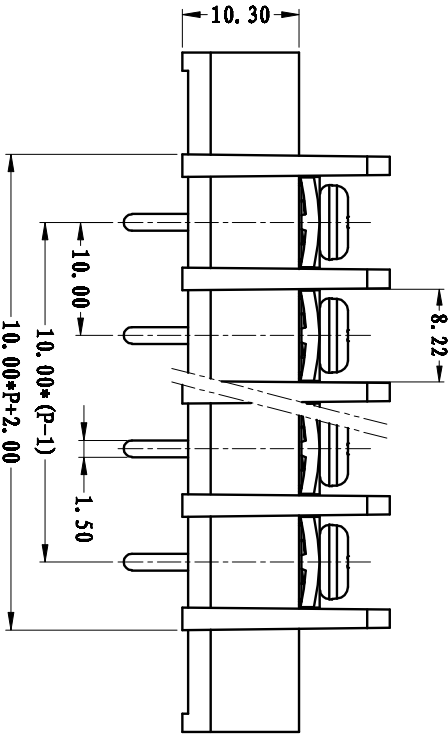
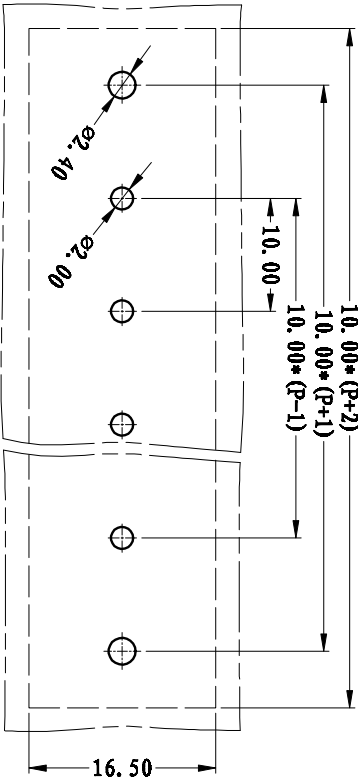


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

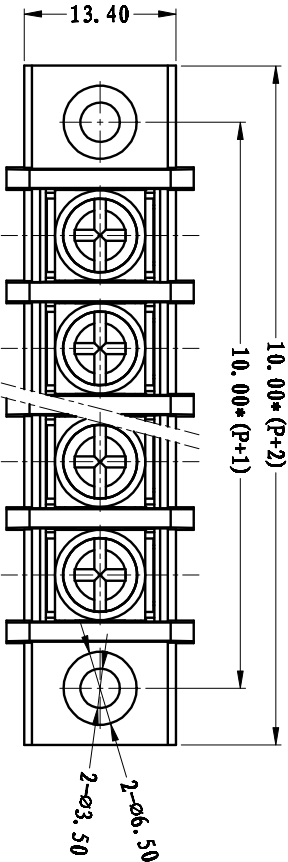

NOTES:
 Pitch : 10.0mm
 Rated Voltage : 300V
 Rated Current : 20 A
 Withstand Voltage : AC2500V for 1 minute
 Insulation Resistance : 1000MΩ / DC500V
 Using Temperature Range : -40℃ ~ +130℃
 Wire range : 22~12 AWG
 Screw Torque Value : 1.2Nm
 技术要求:
 间距: 10.0mm
 额定电压: 300V
 额定电流: 20A
 耐压电压: AC2500V/min
 绝缘阻抗: 1000MΩ / DC500V
 使用条件: -40℃~+130℃
 适用线规: 22~12 AWG
 螺丝扭矩: 1.2Nm

	pitch dimension			Nominal dimension						
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150 to		
variable range	6	6	10	0	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

3	M4*8-7.5*1.5	SQFE1408043V	P	碳钢	三价铬钝化彩锌
2	LTM-C-9.5焊脚	5002B0001AV	P	黄铜	镀黑锡
1	LTM-10.0-本体	5009M071AV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	DATE	11-03-25	UNITS	MM	THIRD ANGLE PROJECTION
CHK.	DATE		SIZE	A4	SHEET
APP.	DATE		SCALE	1:1	1 of 1
				DWG NO.	SP-2-5009005 REV: V0
				TITLE	LTM-10.0-XP-1Y-00A
					LTM-10.0-成品