
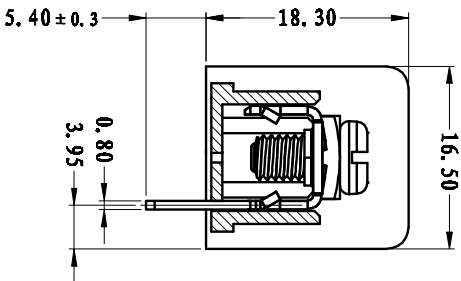
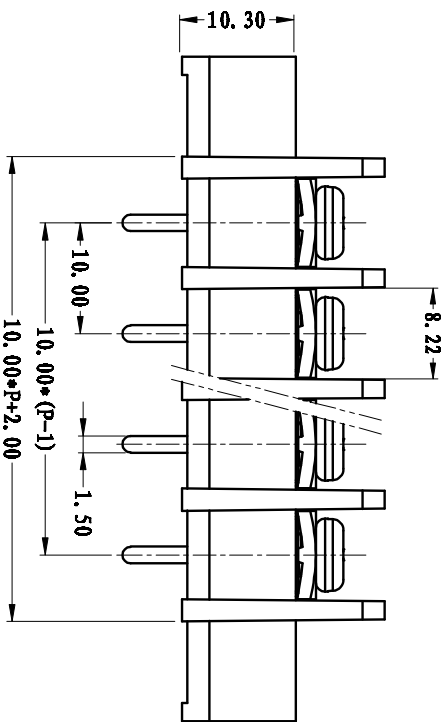
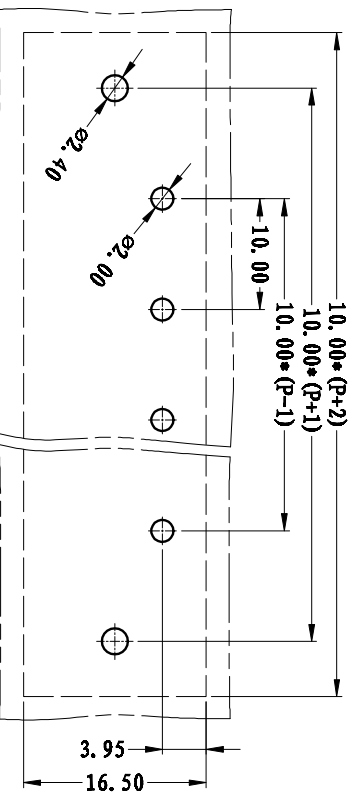


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

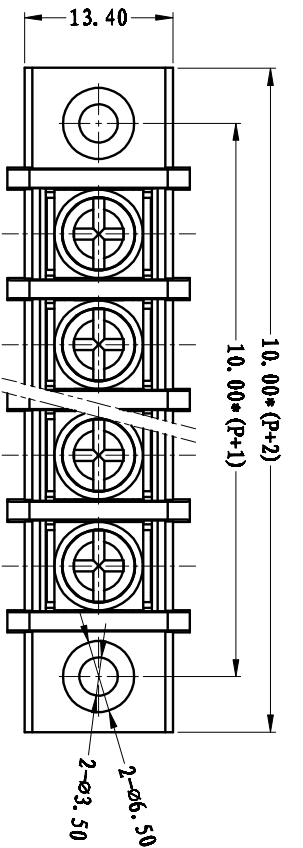

NOTES:
Pitch: 10.0mm
Rated Voltage: 300V
Rated Current: 20 A
Withstand Voltage: AC3500V for 1 minute
Insulation Resistance: 1000MΩ / DC500V
Using Temperature Range: -40℃ ~ +130℃
Wire range: 22~12 AWG
Screw Torque Value: 1.2Nm

技术要求:
间距: 10.0mm
额定电压: 300V
额定电流: 20A
耐电压值: AC3500V/1min
绝缘阻抗: 1000MΩ / DC500V
使用条件: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 1.2Nm

	pitch dimension			Nominal dimension					
	over	over	over	over	over	over	over	over	over
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M4*8-7.5*1.5	SQFE1408043V	P	碳钢	三价铬钝化彩锌
2	LW1B-9.5焊脚	5002B0002AV	P	黄铜	镀黑锡
1	LW1B-10.0-本体	5009M071AV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	DATE	11-03-25	UNITS	MM	THIRD ANGLE PROJECTION
CHK.	DATE		SIZE	A4	SHEET
APP.	DATE		SCALE	1:1	1 of 1
上海联捷电气有限公司			TITLE	LW1B-10.0-成品	
Shanghai Bliinder Electric C.O.,LTD				LW1B-10.0-成品	