
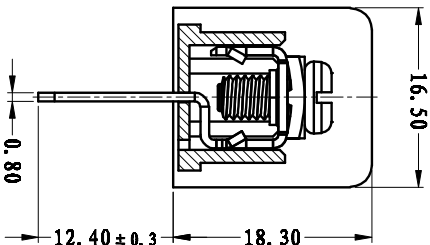
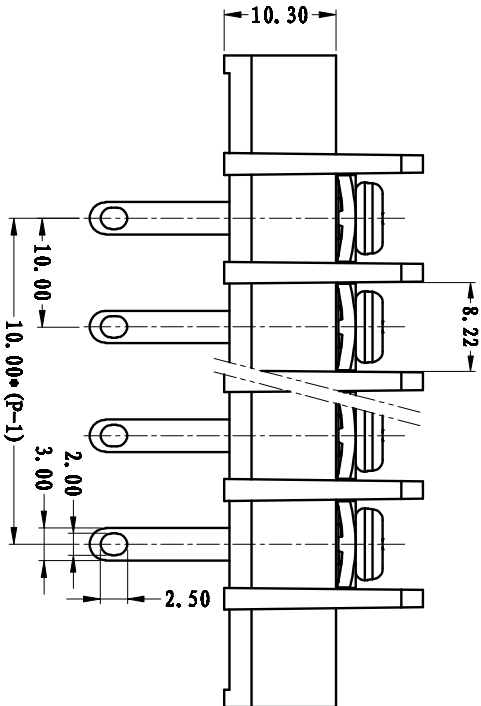
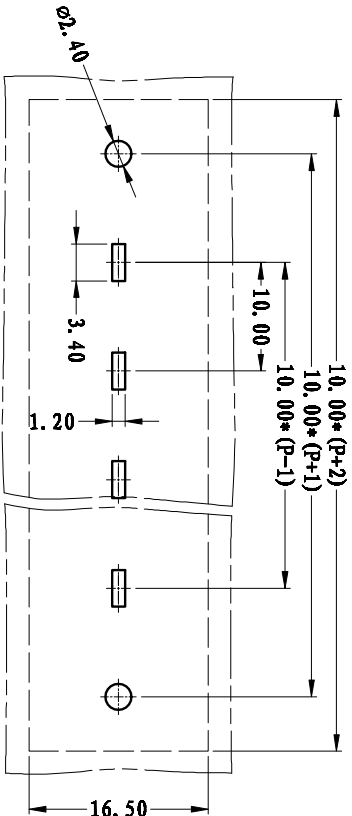


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

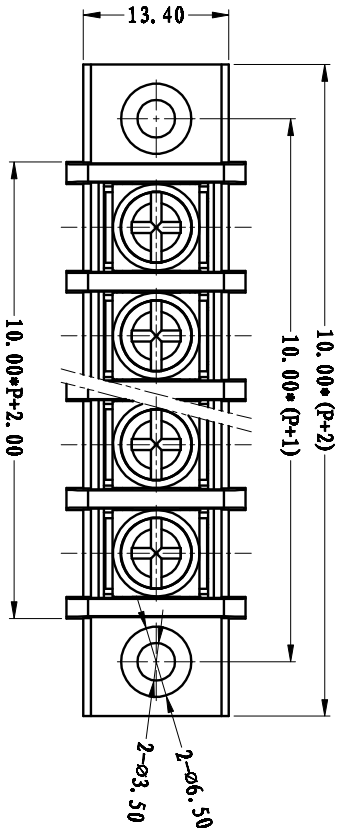

技术要求:
 间距: 10.0mm
 Rated Voltage: 300V
 Rated Current: 20A
 Withstand Voltage: AC2500V for 1 minute
 Insulation Resistance: 1000MΩ / DC500V
 Using Temperature Range: -40℃ ~ +130℃
 Wire range: 22~12 AWG
 Screw Torque Value: 1.2Nm
 材质: 铜
 额定电压: 300V
 额定电流: 20A
 耐压试验: AC2500V/min
 绝缘电阻: 1000MΩ / DC500V
 使用条件: -40℃~+130℃
 适用线规: 22~12 AWG
 螺丝扭矩: 1.2Nm

	pitch dimension			Nominal dimension					
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	6	10	24	30	60	100	150		—
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	M4*8-7.5*1.5	SQFE1408043V	P	碳钢	三价铬钝化彩锌
2	LTMQ-9.5焊脚	5002B0003AV	P	黄铜	镀黑锡
1	LTMQ-10.0-本体	5009M071AV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	DATE	11-03-25	UNITS	MM	THIRD ANGLE PROJECTION
CHK.	DATE		SIZE	A4	
APP.	DATE		SCALE	1:1	
DWG NO.				SP-2-5009007	REV: V0
TITLE				LTMQ-10.0-XT-1Y-00A	
				LTMQ-10.0-成品	