
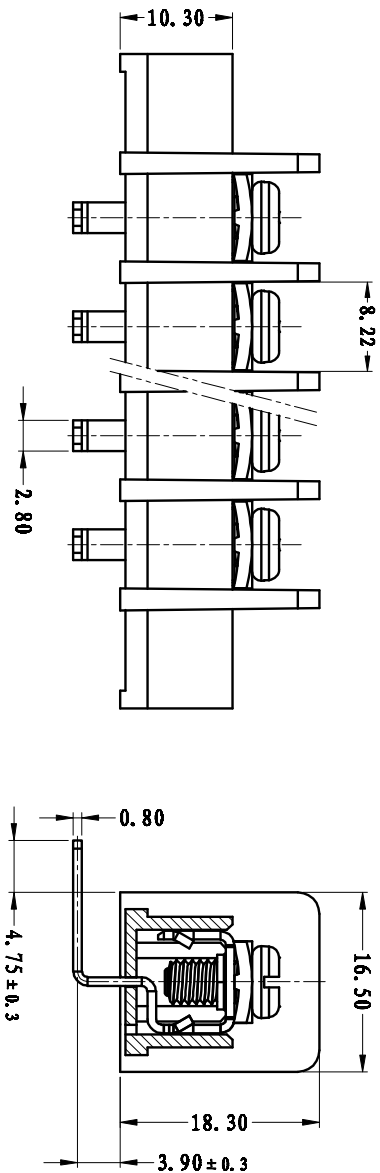


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

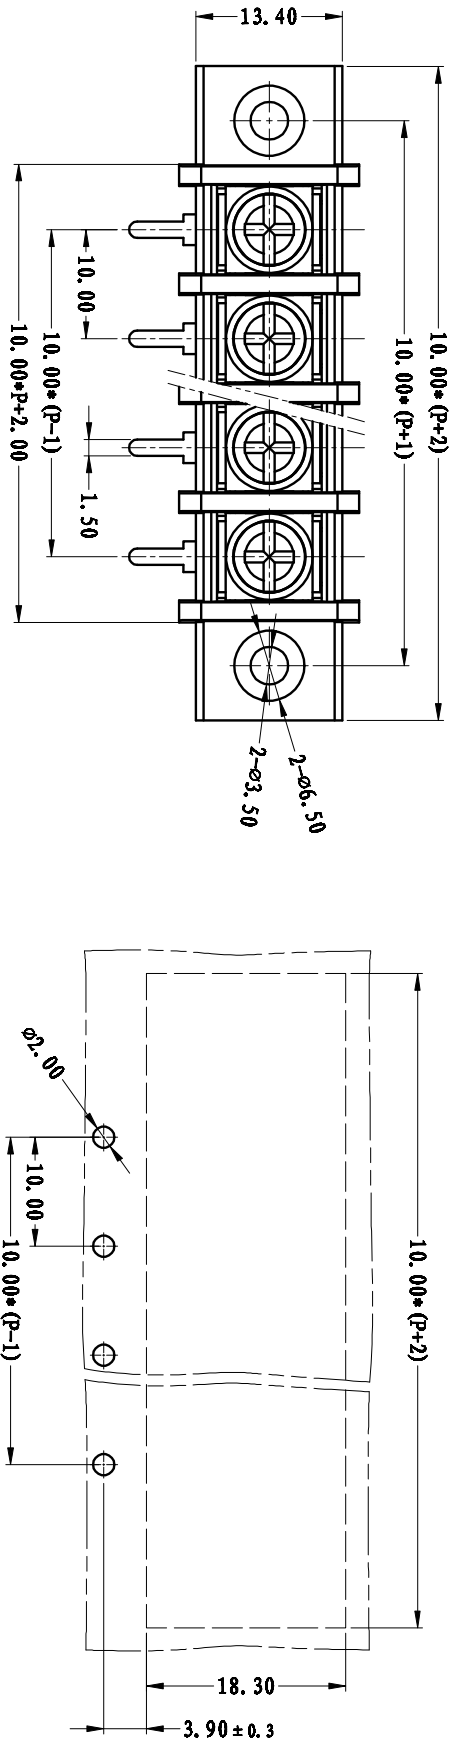

NOTES:
Pitch: 10.0mm
Rated Voltage: 300V
Rated Current: 20A
Withstand Voltage: AC2500V for 1 minute
Insulation Resistance: 1000MΩ/DC500V
Using Temperature Range: -40℃ ~ +130℃
Wire range: 22~12 AWG
Screw Torque Value: 1.2Nm

技术要求:
间距: 10.0mm
额定电压: 300V
额定电流: 20A
耐压电压: AC2500V
绝缘电阻: 1000MΩ/DC500V
使用温度: -40℃~+130℃
适用线规: 22~12 AWG
螺丝扭矩: 1.2Nm

	pitch dimension				Nominal dimension					
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
variable range	6	10	24	30	60	100	150		— □ (	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

3	M4*8-7.5*1.5	SQFE1408043V	P	碳钢	三价铬钝化彩锌
2	LW1R-9.5-焊脚	5002B0004AV	P	黄铜	镀黑锡
1	LW1R-10.0-本体	5009M071XAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	ACTIVE	DATE	11-03-25	UNITS	MM
CHK.	DATE	SCALE	A4	SIZE	THIRD ANGLE PROJECTION
APP.	DATE	SCALE	1:1	DWG NO.	SP-2-5009008
上海联捷电气有限公司				TITLE	REV: V0
Shanghai Blinder Electric Co., Ltd				LW1R-10.0-XTD-1Y-00A	1 of 1
				LW1R-10.0-成品	