
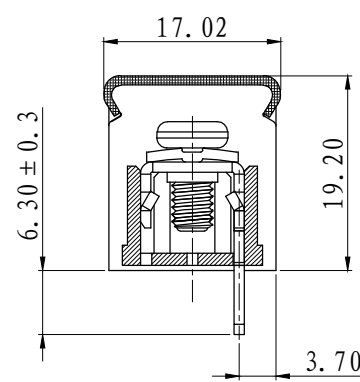
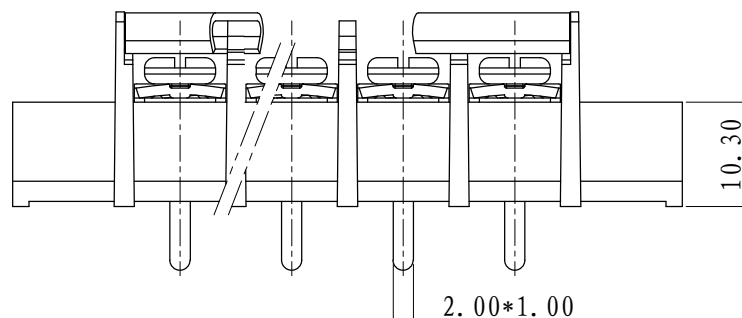
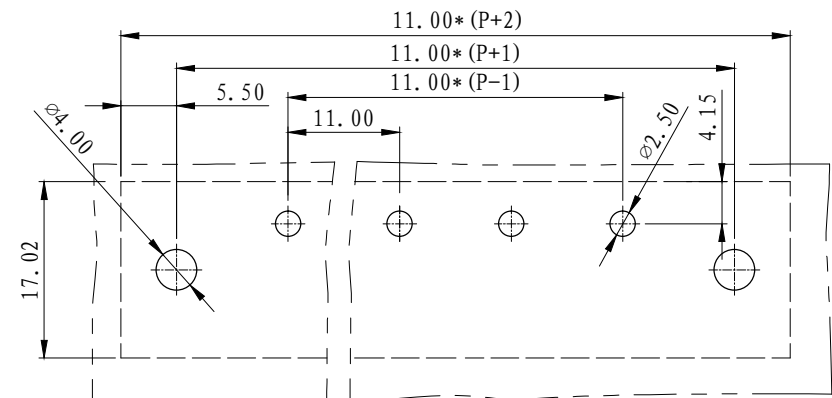


| REVISION RECORD |         |      |      |
|-----------------|---------|------|------|
| REV.            | CONTENT | MOD. | DATE |
| △               | 初版发行    |      |      |

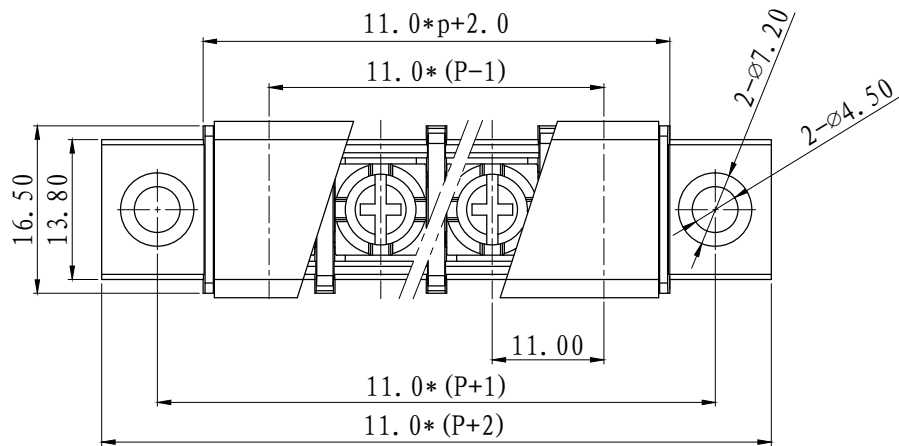


#### NOTES:

1. Voltage Rating: 300V, Current Rating: 20A
2. PITCH: 11.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40°C ~ +130°C
5. Suitable Electric Wire: AWG 22-12
6. Screw Torque Value: 1.2 N.m

#### 技术要求:

1. 额定电压: 300V, 额定电流: 20A
2. 间距: 11.0mm
3. 耐电压值: AC 2500V/min
4. 使用条件: -40°C ~ +130°C
5. 适用线规: AWG 22-12
6. 螺丝扭力: 1.2N.m

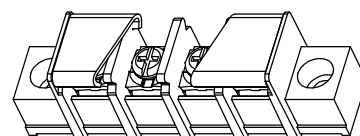

|                | pitch dimension |         |          | Nominal dimension |          |           |            |          | —       |
|----------------|-----------------|---------|----------|-------------------|----------|-----------|------------|----------|---------|
|                | over 0          | over 6  | over 10  | over 0            | over 30  | over 60   | over 100   | over 150 |         |
| variable range | 0 to 6          | 6 to 10 | 10 to 24 | 0 to 30           | 30 to 60 | 60 to 100 | 100 to 150 |          | △       |
| Tolerance      | ±0.1            | ±0.15   | ±0.25    | ±0.2              | ±0.3     | ±0.5      | ±0.7       | ±1.0     | 0.05/10 |

| 4                                                                                                                                             | LW2-11.0 盖子  | 5012C70XXAV   | 1         | PC                     | 透明                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------|-----------|------------------------|-----------------------|
| 3                                                                                                                                             | LW1B-11.0 焊脚 | 5008B0002AV   | P         | 黄铜                     | 镀锡                    |
| 2                                                                                                                                             | M4*8-9*9 螺丝  | SQFFA408063V  | P         | 碳钢                     | 三价铬钝化彩锌               |
| 1                                                                                                                                             | LW2M-11.0-本体 | 5012M0YXXAV   | 1         | PBT                    |                       |
| NO.                                                                                                                                           | NAME OF PART | NO. OF PART   | Q' TY     | MATERIAL               | NOTES                 |
| DES.                                                                                                                                          | 陈明珠          | DATE 24/04/20 | UNITS MM  | THIRD ANGLE PROJECTION | SHEET                 |
| CHK.                                                                                                                                          | 张华丰          | DATE 24/04/20 | SIZE A4   |                        | 1 of 1                |
| APP.                                                                                                                                          |              | DATE          | SCALE 1:1 | DWG NO.                | SP-2-5012006 REV: V0  |
|  <b>上海联捷电气有限公司</b><br>Shanghai Blinker Electric CO., LTD |              |               |           | TITLE                  | LW2MB-11.0-XXP-1Y-00A |
|                                                                                                                                               |              |               |           |                        | LW2MB-11.0-成品         |