
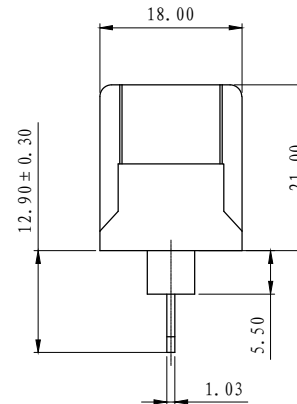
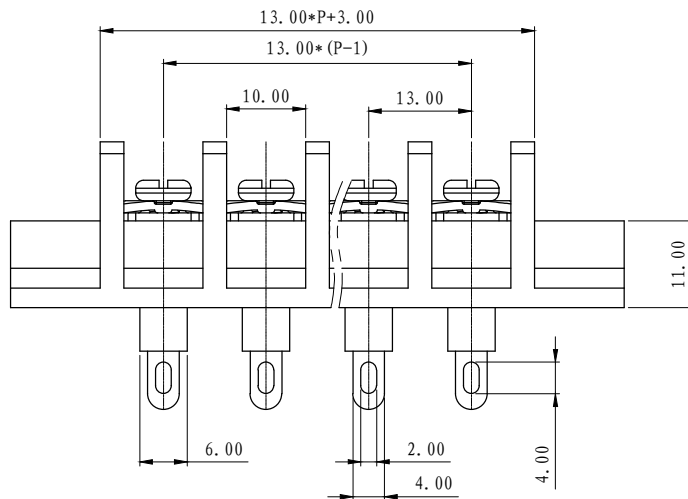
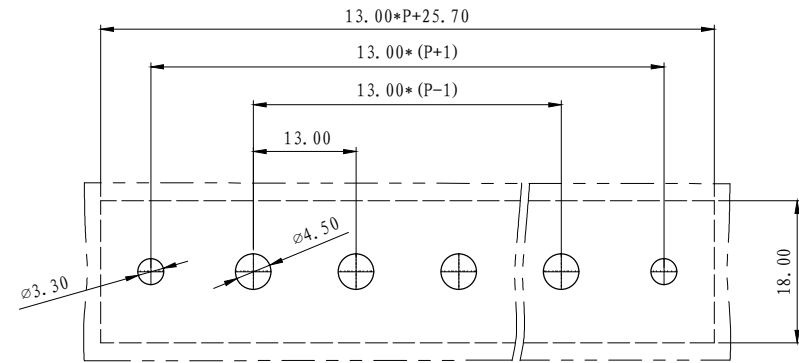


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△/0	初版发行		

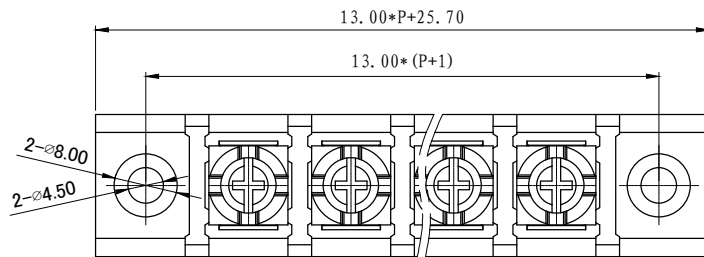

NOTES1:
UL Standard:
1.Voltage Rating : 600V , Current Rating : 40A
IEC Standard:
1.Voltage Rating : 600V , Current Rating : 41A

NOTES2:
Pitch : 13.0mm
Withstand Voltage :
AC3000V for 1 minute
Insulation Resistance :
1000MΩ / DC1000V
Using Temperature Range :
-40℃ ~ +130℃
Wire range : 18~10 AWG
Screw Torque Value : 1.2Nm

技术要求1:
UL 标准:
1. 额定电压: 600V 额定电流: 40A
IEC 标准:
1. 额定电压: 600V 额定电流: 41A

技术要求2:
间距: 13.0mm
耐电压值: AC3000V/min
绝缘阻抗: 1000MΩ/DC1000V
使用条件: -40℃~+130℃
适用线规: 18~10 AWG
螺丝扭矩: 1.2Nm

	pitch dimension			Nominal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LW-圆柱	5034A0Y01V	P	PA66	
3	LW1Q-13.0-焊脚	5020B0003AV	P	黄铜	镀雾锡
2	M4*8-10*10	SQFFA408073V	P	碳钢	三价铬钝化彩锌
1	LW1M-13.0-主体	5020M0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	陈明珠	DATE 2024/04/18	UNITS mm	THIRD ANGLE PROJECTION	
CHK.	张华丰	DATE 2024/04/18	SIZE A4	1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LW1MQJ-13.0-XXP-1Y-00A
					LW1MQJ-13.0-成品