
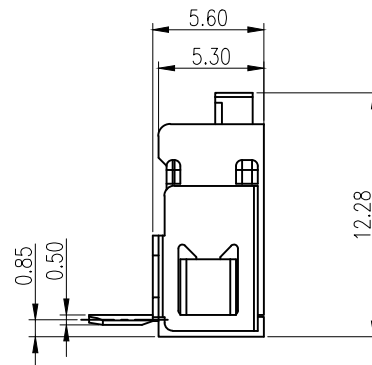
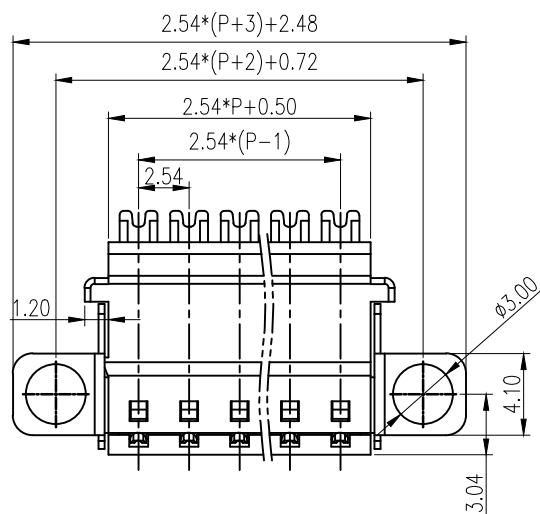
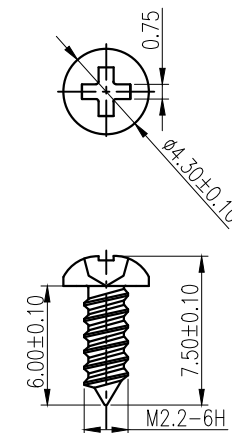
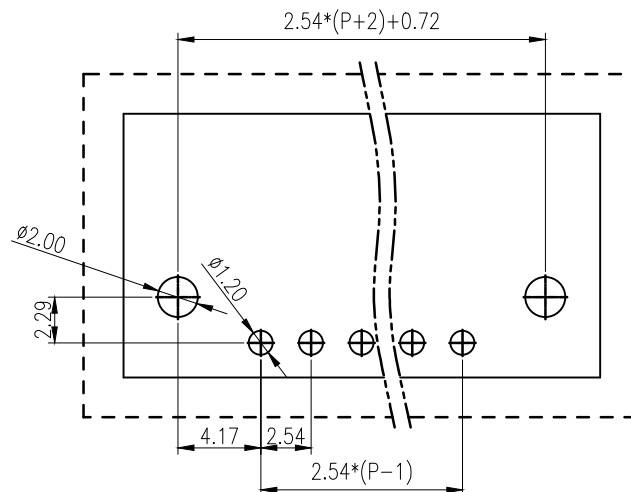


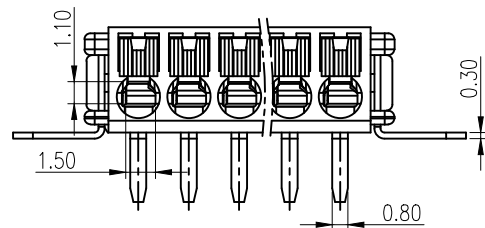

NOTES:

1. Voltage Rating: 160V, Current Rating: 6A
2. PITCH: 2.54mm
3. Insulation Withstands Voltage: AC2000V/min
4. Using Temperature Range: -40℃ ~ +105℃
5. Suitable Electric Wire: 26-20AWG

技术要求:

1. 额定电压: 160V, 额定电流: 6A
2. 间距: 2.54mm
3. 耐电压值: AC 2000V/min
4. 使用条件: -40℃ ~ +105℃
5. 适用线规: 26-20AWG

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	M2.2*6圆头自攻螺丝	SQZSA226509V	2	蓝白锌	
6	LC8N左右固定片	H1D0030025E1	1	不锈钢	
5	LC8-2.54弹片	1169B0002AV	P	不锈钢	
4	LS341-2.54-R针	1171B0001AV	1	磷青铜	镀亮锡
3	LC8按钮	1169D0Y01AV	P	POM	
2	LS341-2.54盖板	1171A0YXXAV	1	PA66	
1	LC8M-2.54主体	1169M0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	吴央阳	DATE	24/03/04	UNITS	mm
CHK.	张华丰	DATE	24/03/04	SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-2-1171001	REV: V0
TITLE				LS341RN-2.54-成品	



上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD

TITLE

LS341RN-2.54-成品