




REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		


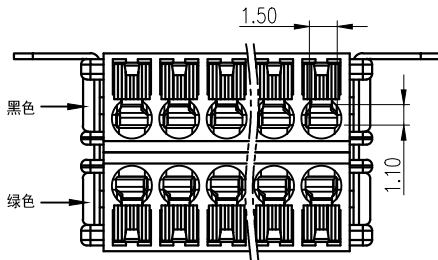


NOTES:

1. Voltage Rating: 160V, Current Rating: 6A
2. PITCH: 2.54mm
3. Insulation Withstands Voltage: AC2000V/min
4. Insulation Resistance: 2.0 MΩ or more at DC500V
5. Using Temperature Range: -40℃ ~ +105℃
6. Suitable Electric Wire: 26-20AWG

技术要求:

1. 额定电压: 160V, 额定电流: 6A
2. 间距: 2.54mm
3. 耐压值: AC 2000V/min
4. 绝缘阻抗 2.0兆欧
5. 使用条件: -40℃ ~ +105℃
6. 适用线规: 26-20AWG

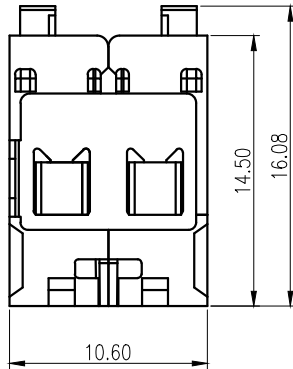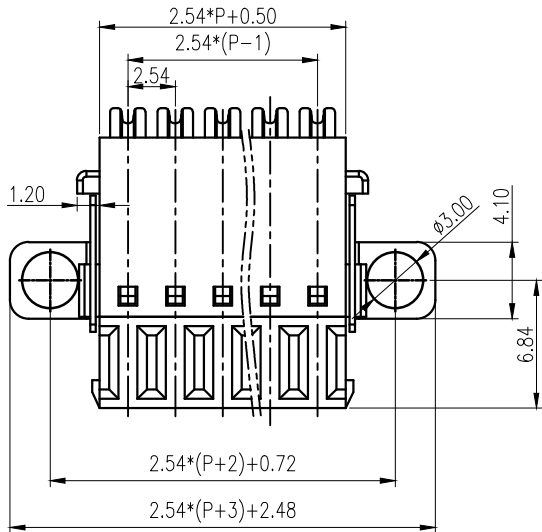

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150		▱ ⤿
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

8	M2.2*6圆头自攻螺丝	SQZSA226509V	2	碳钢	蓝白锌
7	LC88N右固定片	H1D0030025E3	1	不锈钢	
6	LC88N左固定片	H1D0030025E2	1	不锈钢	
5	LC80针	1170B0001AV	2P	磷青铜	镀亮锡
4	LC8-2.54弹片	1169B0002AV	2P	不锈钢	
3	LC8按钮	1169D0Y01AV	2P	POM	
2	LC8-2.54-盖板	1258C0YXXAV	2	PA66	
1	LC8-2.54主体	1169A0YXXAV	2	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	吴央阳	DATE 24/02/20	UNITS mm	THIRD ANGLE PROJECTION	
CHK.	张华丰	DATE 24/02/20	SIZE A4		
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-1169002 REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LC880N-2.54-2*XXP-1Y/1Y-004 LC880N-2.54-成品