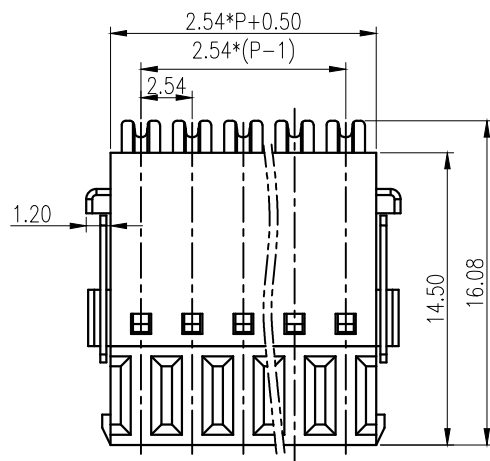
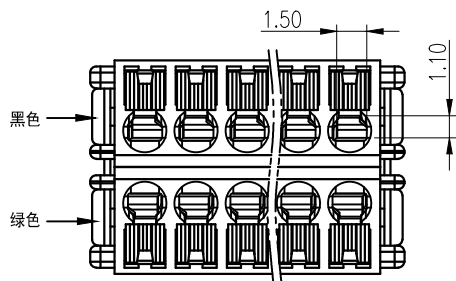


REVISION RECORD

REV.	CONTENT	MOD.	DATE
△	初版发行		

NOTES:

1. Voltage Rating: 160V, Current Rating: 6A
2. PITCH: 2.54mm
3. Insulation Withstands Voltage: AC2000V/min
4. Insulation Resistance: 2.0 MΩ or more at DC500V
5. Using Temperature Range: -40℃ ~ +105℃
6. Suitable Electric Wire: 26-20AWG

技术要求:

1. 额定电压: 160V, 额定电流: 6A
2. 间距: 2.54mm
3. 耐压值: AC 2000V/min
4. 绝缘阻抗: 2.0兆欧
5. 使用条件: -40℃ ~ +105℃
6. 适用线规: 26-20AWG

	pitch dimension			Nominal dimension					— □ ⌒
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range									
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LC88F固定片	H1D0030025EV	2	不锈钢	
5	LC80针	1170B0001AV	2P	磷青铜	镀亮锡
4	LC8-2.54弹片	1169B0002AV	2P	不锈钢	
3	LC8按钮	1169D0Y01AV	2P	POM	
2	LC80-2.54-盖板	1258C0YXXAV	2	PA66	
1	LC8-2.54主体	1169A0YXXAV	2	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	吴央阳	DATE	24/02/20	UNITS	mm
CHK.	张华丰	DATE	24/02/20	SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-2-1169002	REV: V0
TITLE				LC880-2.54-2*XXP-1Y/1Y-00	
				LC880-2.54-成品	



上海联捷电气有限公司
Shanghai Elinker Electric CO.,LTD

TITLE

LC880-2.54-2*XXP-1Y/1Y-00
LC880-2.54-成品