

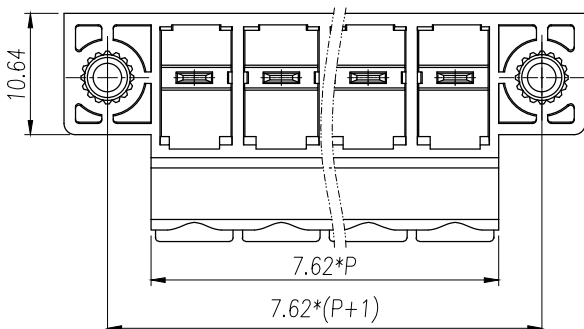


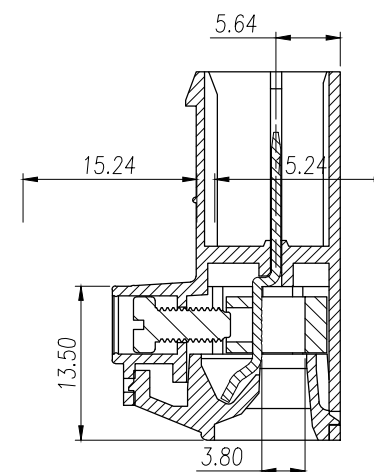

- 1.Voltage Rating: 380V, Current Rating: 32A
- 2.PITCH: 7.62mm
- 3.Insulation Withstands Voltage: AC2500V/min
- 4.Using Temperature Range:-40℃~+105℃
- 5.Suitable Electric Wire: 24-10 AWG
- 6.Screw Torque Value: 0.5N.m

1. 额定电压: 380V, 额定电流: 32A
2. 间距: 7.62mm
3. 耐压值: AC2500V/min
4. 使用条件: $-40^{\circ} - +105^{\circ}$
5. 适用线规: 24-10 AWG
6. 螺丝扭矩: 0.5N.m

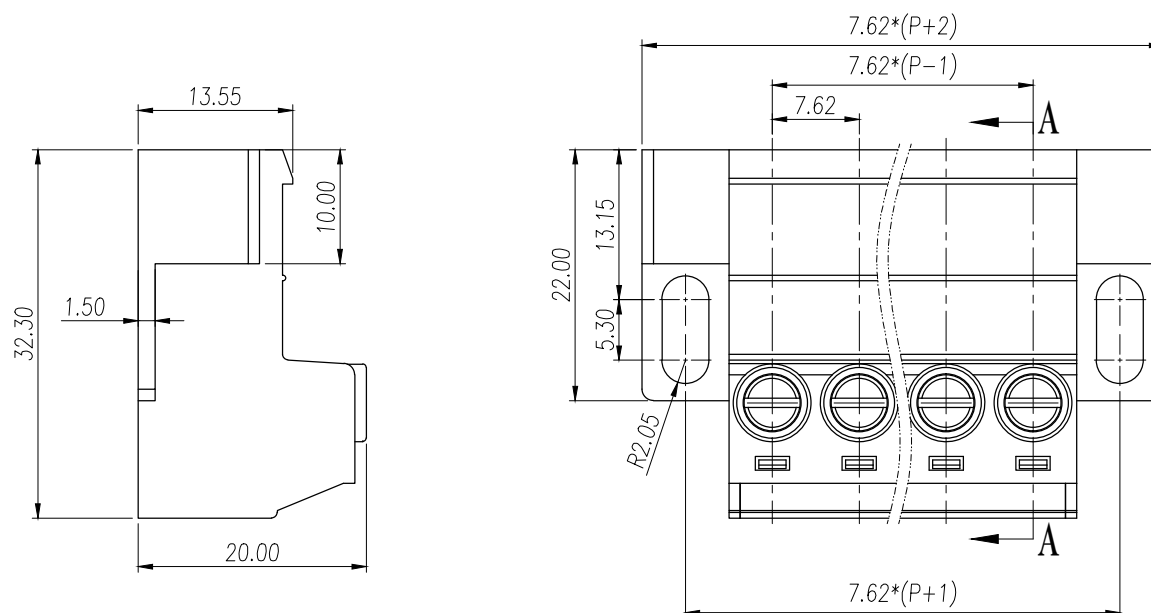

SECTION A-A

	pitch dimension			Nominal dimension					—
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

[illegible]