


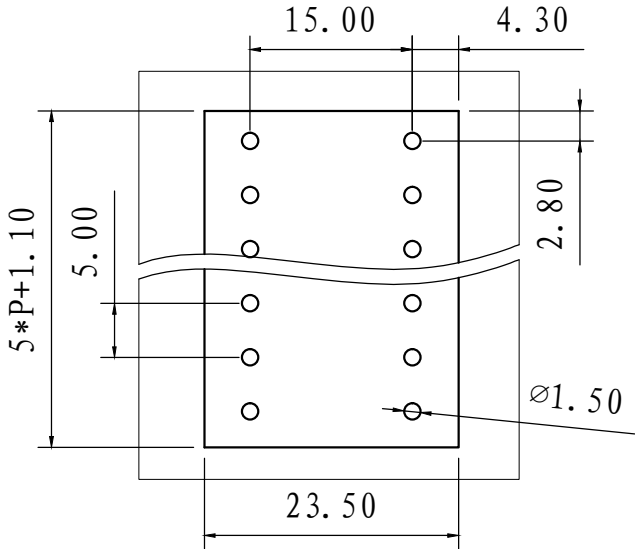


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	新发行		

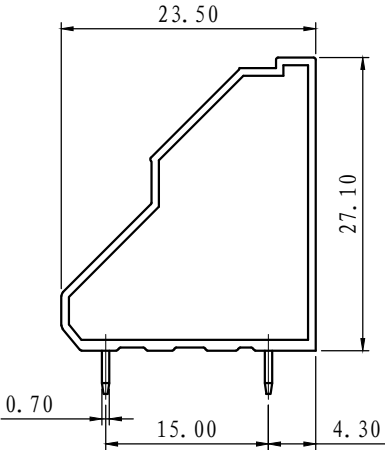

NOTES:
Pitch : 5.0mm
Rated Voltage : 300 V
Rated Current : 17 A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range :
Single conductor:24~14 AWG
stranded conductor: 24~16 AWG

技术要求:
间距: 5.0mm
额定电压: 300V
额定电流: 17A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 单股导线24~ 14AWG
多股导线24~ 16AWG

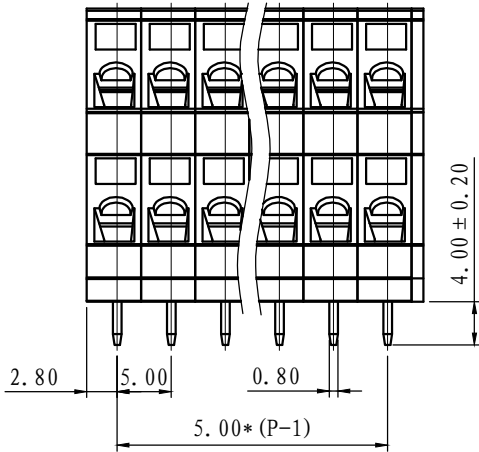

	pitch dimension			Nominal dimension					—
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	▱
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	LS245-2-焊脚	3014B0002AV	P	紫铜	镀雾锡
5	LS245-1-焊脚	3014B0001AV	P	紫铜	镀雾锡
4	LS243弹片	F2A0DLS243BV	3P	不锈钢	
3	LS245T-边件	3015A1001AV-1	1	PA66	
2	LS245T-中间件	3015A1001AV	P-1	PA66	
1	LS245T-盖板	3015C1001AV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	吴央阳	DATE	2024-1-29	UNITS	mm
CHK.	张华丰	DATE	2024-1-29	SIZE	A4
APP.		DATE		SCALE	1:1
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	LS245T-5.0-XXP-1V-00A LS245T-5.0-成品