
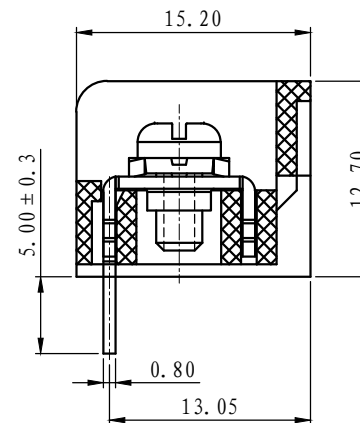
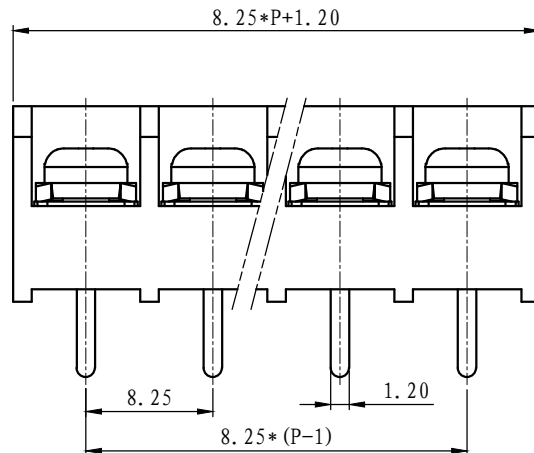
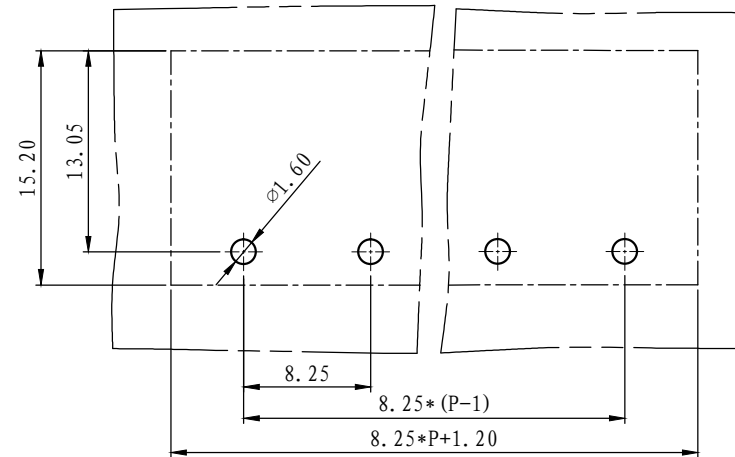


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

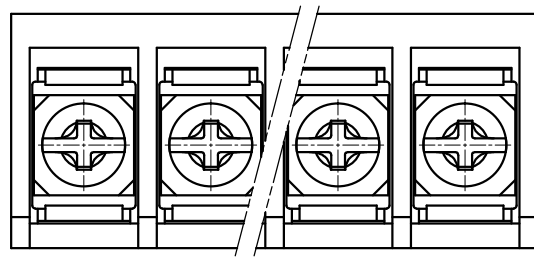

NOTES:
Pitch: 8.25mm
Rated Voltage: 300V
Rated Current: 20 A
Withstand Voltage:
AC2500V for 1 minute
Using Temperature Range:
-40℃ ~ +130℃
Wire range: 22-12 AWG
Screw Torque Value: 0.5Nm

技术要求:
间距: 8.25mm
额定电压: 300V
额定电流: 20A
耐电压值: AC2500V/min
使用条件: -40℃~+130℃
适用线规: 22-12 AWG
螺丝扭矩: 0.5Nm

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	— ▱ ○
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3.	M3*6 (6.5*6.5)		SQFFA306033V		P	碳钢	镀锌
2.	LW3B-8.25-焊脚		5001B0001AV		P	黄铜	镀零锡
1.	LW3-8.25-本体		5001A0YXXAV		1	PBT	
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	吴央阳	DATE	2024-1-12	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	张华丰	DATE	2024-1-12	SIZE	A4	 SHEET 1 of 1	
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-5001001 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD						TITLE	LW3A-8.25-XXP-1Y-00A
							LW3A-8.25-成品

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	吴央阳	DATE	2024-1-12	UNITS	mm
CHK.	张华丰	DATE	2024-1-12	SIZE	A4
APP.		DATE		SCALE	1:1

 上海联捷电气有限公司 Shanghai Elinker Electric C.O,LTD	TITLE	LW3A-8.25-XXP-1Y-00A
		LW3A-8.25-成品