



REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		




NOTES:


1. Voltage Rating: 300V, Current Rating: 10A
2. PITCH: 5.0mm
3. Insulation Withstands Voltage: AC2500V/min
4. Insulation Resistance: 500M Ω or more at DC500V
5. Using Temperature Range: -30° C - +120° C
6. Suitable Electric Wire: 22-14AWG
7. Screw Torque Value: 0.5Nm

技术要求:



1. 额定电压: 300V, 额定电流: 10A
2. 间距: 5.0mm
3. 耐压值: AC 2500V/min
4. 绝缘阻抗500兆欧/DC500V
5. 使用条件: -30°C ~ $+120^{\circ}\text{C}$
6. 适用线规: 22-14AWG
7. 螺丝扭力: 0.5Nm

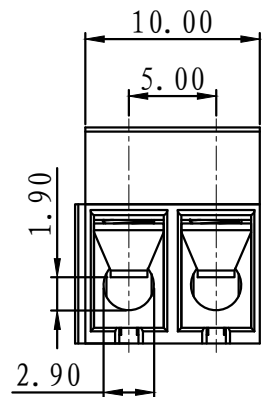

2P

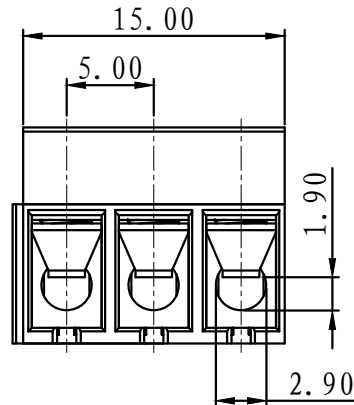

3P

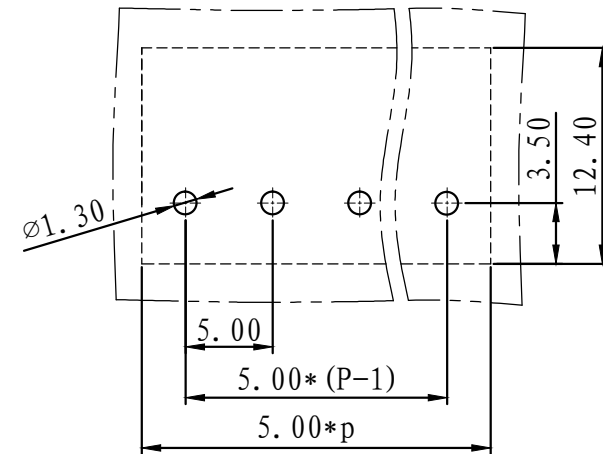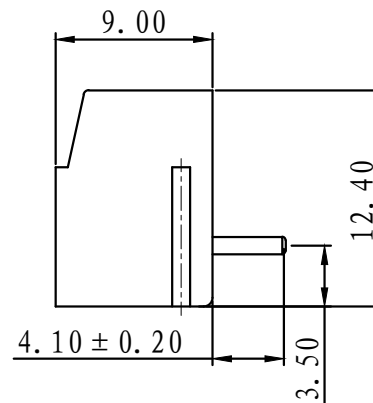

	pitch dimension			Nominal dimension					—
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
	to	to	to	to	to	to	to		
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LG300-5.0-螺丝		SPOYA305301V-1		P	碳钢	三价铬钝化彩锌	
3	LG300-5.0-弹片		F2A0DLG300BV		P	不锈钢		
2	LG300R-5.0-方针		2074B0001AV		P	黄铜	镀锡	
1	LG300R-5.0-主体		2074A0YXXAV		1	PBT		
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES	
DES.	WL	DATE	2013/02/20	UNITS	MM	THIRD ANGLE PROJECTION		SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1: 1	DWG NO.	SP-2-2074001	REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD						TITLE	LG300R-5.0-XXP-1Y-00A	
							LG300R-5.0-成品	