

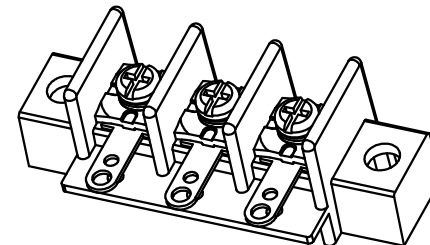
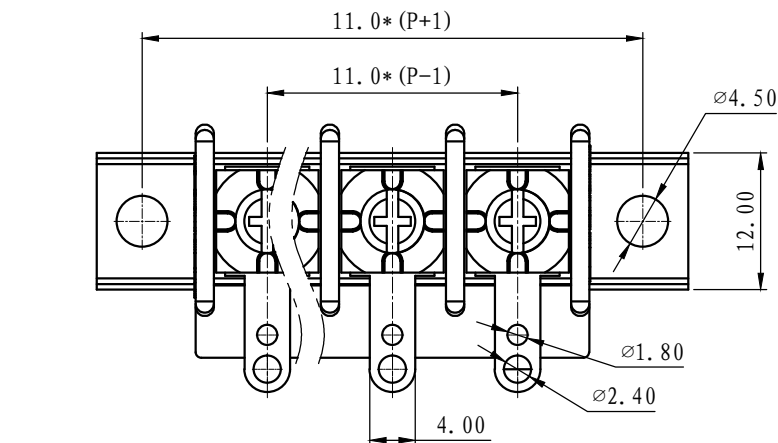


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

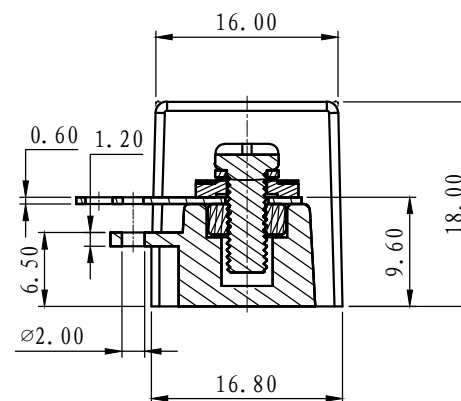

NOTES:
Pitch : 11.0mm
Rated Voltage : 250V
Rated Current : 15A
Withstand Voltage :
AC2000V for 1 minute
Using Temperature Range :
-40℃ ~ +130℃
Wire range : 22-14 AWG
Screw Torque Value : 0.8Nm

技术要求:
间距: 11.0mm
额定电压: 250V
额定电流: 15A
耐压值: AC 2000V/min
使用条件: -40℃~+130℃
适用线规: 22-14 AWG
螺丝扭矩: 0.8 Nm

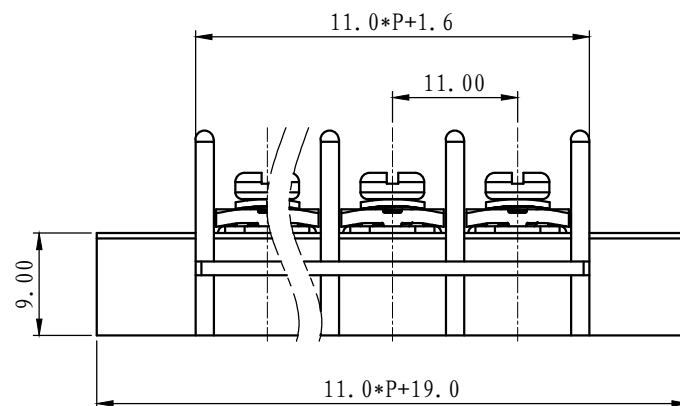

	pitch dimension			Nominal dimension					
variable	over	over	over	over	over	over	over	over	—
range	0	6	10	0	30	60	100	150	□
	to	to	to	to	to	to	to		○
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

4	LW8-11.0-螺母	SM00A350001V	P	铁	三价铬钝化彩锌
3	LW8-11.0-螺丝	SPFFC359063V	P	碳钢	三价铬钝化彩锌
2	LW8-11.0-焊脚	5019B0001AV	P	黄铜	镀雾锡
1	LW8M-11.0-本体	5019M0YXXAV	1	PBT	
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	XLM	DATE	11-10-08	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-1-5019M01	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric CO., LTD				TITLE	LW8M-11.0-XXP-1Y-00A LW8M-11.0-成品