

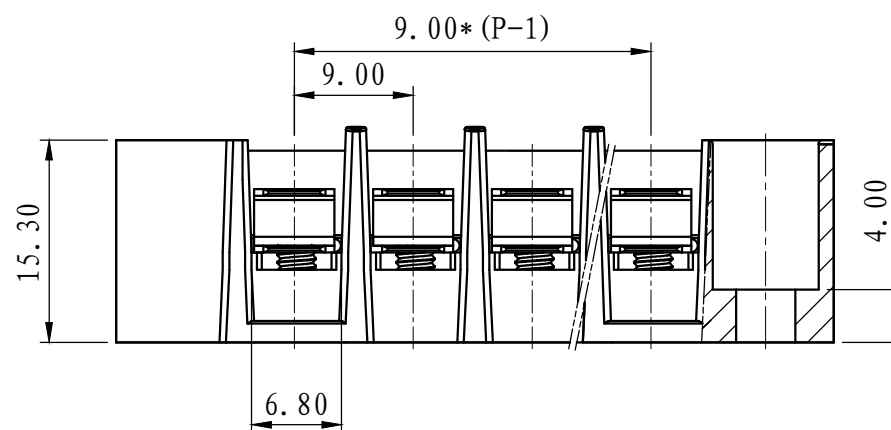


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△			

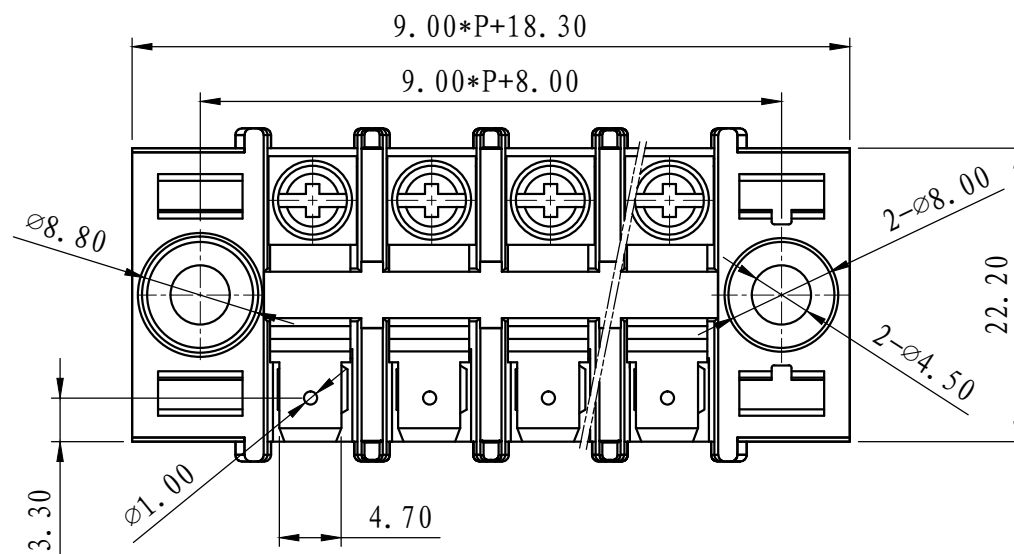

NOTES:
Pitch: 9.0mm
Rated Voltage: 600V
Rated Current: 15A
Withstand Voltage:
AC3000V for 1 minute
Insulation Resistance:
1000MΩ / DC1000V
Using Temperature Range:
-40℃ ~ +105℃
Suitable Electric Wire: 22-16 AWG
Screw Torque Value: M3/0.5Nm
Adaptable terminals: FDD1-187(5)

技术要求:
间距: 9.0mm
额定电压: 600V
额定电流: 15A
耐电压值: AC3000V/min
绝缘阻抗: 1000MΩ/DC1000V
使用条件: -40℃~+105℃
适用线规: 22-16 AWG
螺丝扭矩: M3/0.5Nm
可适配端头: FDD1-187(5)

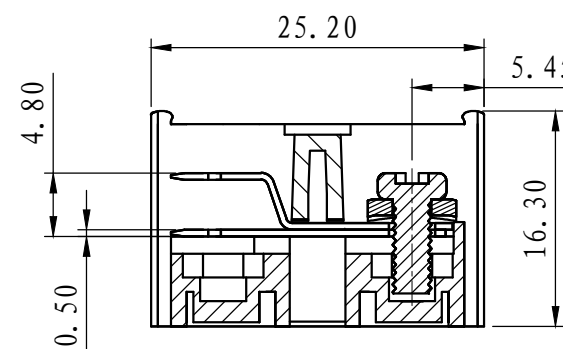

4	M3外六角螺母	SM00A000003V	P	铁	三价铬钝化彩锌
3	M3*8-6.5*6.5	SPFFA307031V	P	碳钢	镀蓝白锌
2	JX0-15A-导电件	6JX0BDD150AV	P	黄铜	镀镍
1	TB1-15XX-A本体	6TB1E0Y1XX0V	1	PC	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2012/07/03	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	
				DWG NO.	SP-2-6TB1E15
				TITLE	TB1-15XX-B-1Y-00A
					TB1-15XX-B-成品



上海联捷电气有限公司
Shanghai Elinker Electric CO., LTD

TITLE

TB1-15XX-B-1Y-00A
TB1-15XX-B-成品

	pitch dimension			Nominal dimension					
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10