




REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

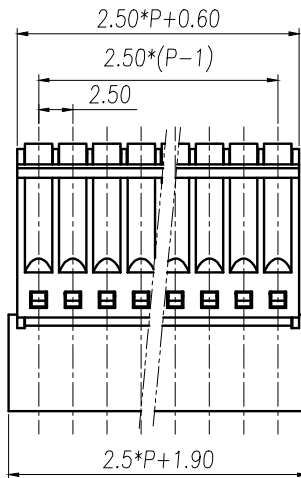

Pitch : 2.5mm
Rated Voltage : 150 V
Rated Current : 4A
Withstand Voltage :
AC2000V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range :24 ~20 AWG

间距: 2.5mm
额定电压: 150V
额定电流: 4A
耐电压值: AC2000V/min
绝缘阻抗: 500M Ω /DC500V
使用条件: -40℃~+105℃
适用线规: 24~20 AWG

	pitch dimension			Nominal dimension					—
variable range	over	over	over	over	over	over	over	over	 
	0	6	10	0	30	60	100	150	
	to	to	to	to	to	to	to		
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	LC60-2.5五金件		2090B0001AV		P	磷青铜	镀亮锡
4	LC6-2.5-弹片		F2A0DL C625BV		P	不锈钢	
3	LC6-2.5-按钮		1023D0YXXAV		P	POM	
2	LC60-2.5-盖板		2090C0YXXAV		1	PA66-V0	
1	LC6-2.5-本体		1023A0YXXAV		1	PA66-V0	
NO.	NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	WY	DATE	2022/07/18	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.		DATE		SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-1-2081140 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric Co., LTD						TITLE	LC60-2.5-XXP-1Y-00A
							LC60-2.5-成品