
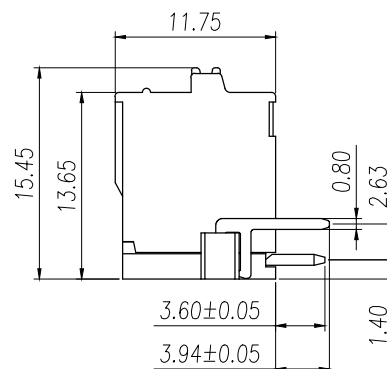
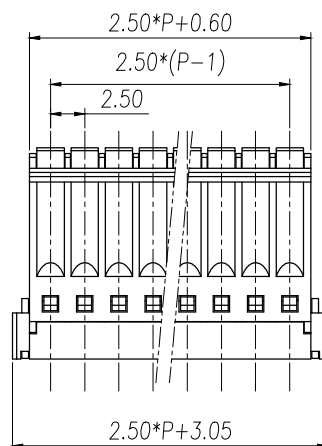
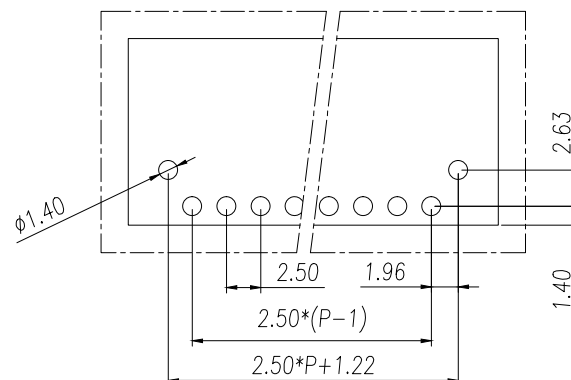


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		

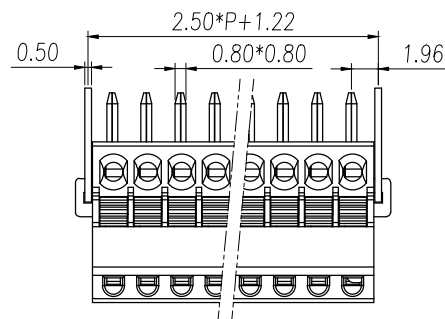


NOTES:

Pitch : 2.5mm
 Rated Voltage : 150V
 Rated Current : 4A
 Withstand Voltage :
 AC2000V for 1 minute
 Insulation Resistance :
 500MΩ / DC500V
 Using Temperature Range :
 - 40℃ ~ + 105℃
 Wire range :24 ~20 AWG

技术要求:

间距: 2.5mm
 额定电压: 150V
 额定电流: 4A
 耐电压值: AC2000V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 24~20 AWG

	pitch dimension			Nominal dimension					
variable range	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	—
	to 6	to 10	to 24	to 30	to 60	to 100	to 150		□
									○
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	R3.81/3.5耳朵五金件		2079B0004AV		P	黄铜	镀亮锡	
5	LS240V(R)-2.5五金件		2094B0001AV		P	磷青铜	镀亮锡	
4	LC6-2.5-弹片		F2A0DLC625BV		P	不锈钢		
3	LC6-2.5-按钮		1023D0YXXAV		P	POM		
2	LS240V/R-2.5-盖板		2094C0YXXAV		1	PA66-V0		
1	LC6-2.5-本体		1023A0YXXAV		1	PA66-V0		
NO.		NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.	WY	DATE	2023/01/07	UNITS	MM	THIRD ANGLE PROJECTION 		SHEET
CHK.		DATE		SIZE	A4			1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-1-2081140	REV:V0
上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD						TITLE	LS240R-2.5-XXP-1Y-00A	
							LS240R-2.5-成品	