

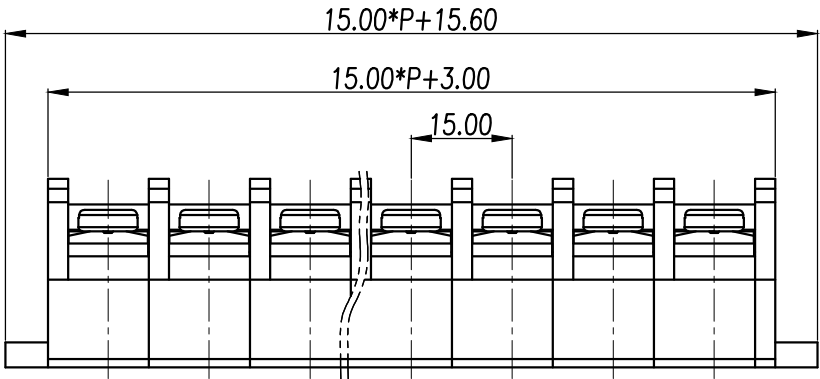
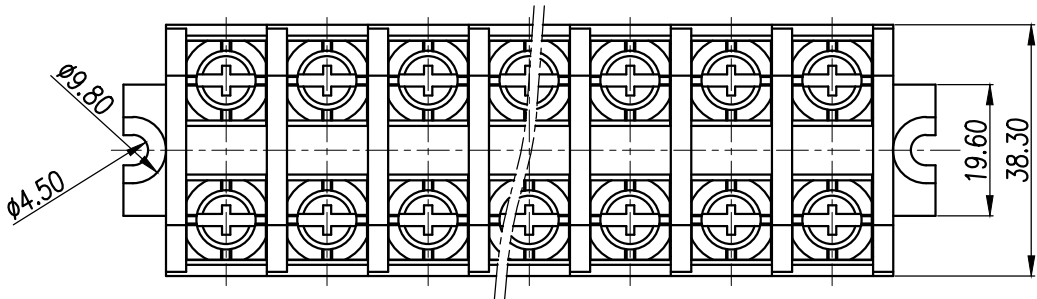



REVISION RECORD			
REV.	CONTENT	MOD.	DATE

备注：端子上面有透明罩盖

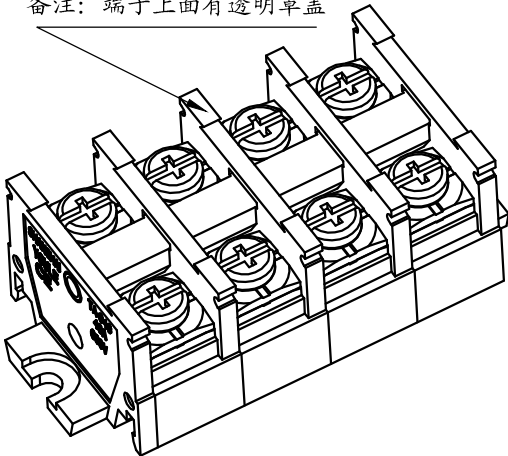

技术要求：
极数：组装
额定电压：600V
额定电流：40A
螺钉类型/扭力：M5/2.0-3.0
绝缘材料类型：PC
阻燃等级：V0
刚柔性导线：6mm²



	pitch dimension			Nominal dimension					— □ ○
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

7	TR-40罩盖	6012C0000100	1	PC	透明	
6	TR-40螺母	SNM03000010V	1	黄铜	镀镍	
5	TR-40螺杆	L0003000010V	1	铁	镀锌	
4	TR-40螺丝	SSD05000010V	2P	碳钢	镀镍	
3	TR-40导电件	6012B000010V	P	H62	镀镍	
2	TR-40端板	6012C30XXAV	1	PC	黑色	
1	TR-40本体	6012A30XXAV	P	PC	黑色	
NO.	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE	2012/05/25	UNITS	mm	THIRD ANGLE PROJECTION
CHK.		DATE		SIZE	A4	 SHEET
APP.		DATE		SCALE	1:1	DWG NO. 6012A30 REV: T0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD					TITLE	TR-40XX-130-00A
						TR-40A-成品