

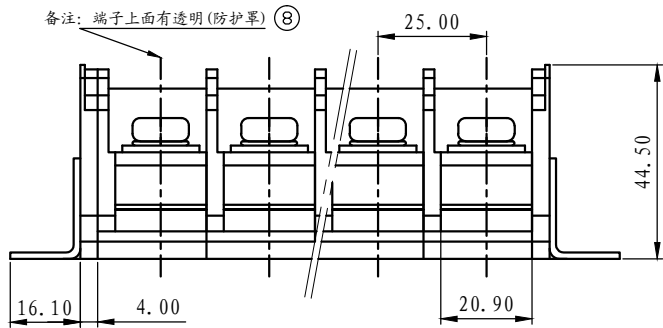


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		

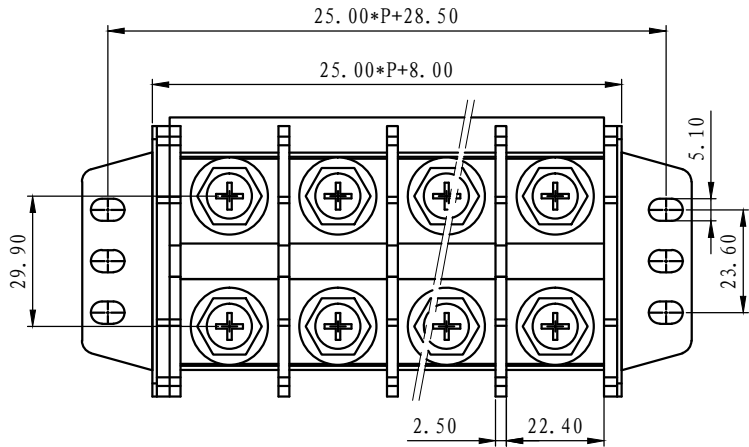

技术要求:

- | | |
|----------------|-------------------|
| 1. 电压/电流 | 1000V/100A |
| 2. 刚/柔性导线 | 25mm ² |
| 3. 螺钉类型/扭力-/Nm | M8/6.0-10.0 |
| 4. 绝缘材料类型 | PC |
| 5. 阻燃级别 | V1 |
| 6. 线数 | 组装 |

	pitch dimension			Naminal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		▱ ⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

8	TR-100防护盖	6026C00010V	1	PC	镀锌
7	TR-80螺母	SNM0400010V	2	黄铜	镀锌 两者起固定
6	TR-150螺杆	L000400020V	2	铁	镀锌 联接作用
5	TR-80固定件	6013B00020V	2	铁	镀锌
4	TR-150螺丝	SSD0800010V	2P	碳钢	镀镍
3	TR-100导电件	6026B00010V	P	H62	镀镍
2	TR-100端板	6026C30XXAV	2	PC	黑色
1	TR-100本体	6026A30XXAV	P	PC	黑色
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	LDD	DATE 2012/08/22	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	REV: T0
上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TR-100A-XX-130-00A TR-100A-产品