
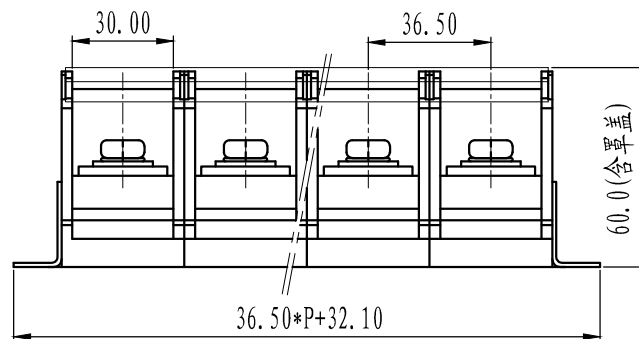


REVISION		RECORD	
REV.	CONTENT	MOD.	DATE
	初版发行		

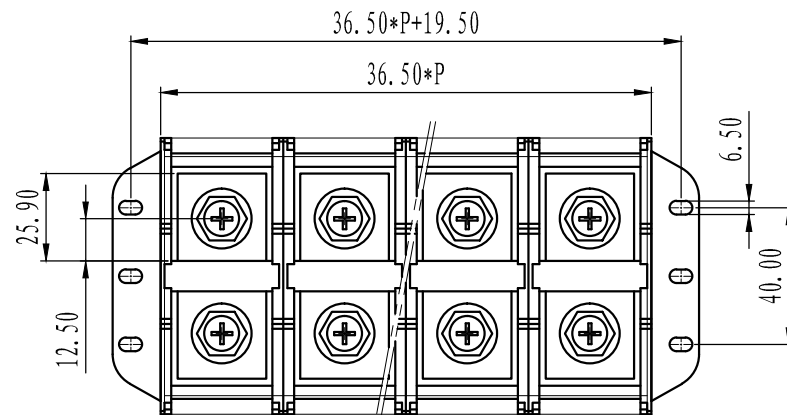


NOTES:

1. Rated Voltage(V)/Current(A): 1000V/200A
2. Wire Range(rigid and flexible): 70mm²
3. Screw type/Torque Tightening: M8/6.0-10.0N.m
4. Type of insulation material: PC
5. Flame retardant grade: V0

技术要求:

1. 电压/电流: 1000V/200A
2. 刚/柔性导线: 70mm²
3. 螺钉类型/扭力: M8/6.0-10.0N.m
4. 绝缘材料类型: PC
5. 阻燃级别: V0



	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		()
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

8	TR-200防护盖	6029C00010V	1	PC	透明	
7	TR-80螺母	SNM0400010V	2	黄铜	镀锌	两者起固定
6	TR-150螺杆	L000400020V	2	铁	镀锌	联接作用
5	TR-200固定件	6029B00020V	2	铁	镀锌	
4	TR-200螺丝	SSD0800020V	2P	碳钢	镀锌	
3	TR-200导电件	6029B00010V	P	黄铜	镀锌	
2	TR-200端板	6029C30XXAV	2	PC	黑色	
1	TR-200本体	6029A30XXAV	P	PC	黑色	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES	
DES.	LDD	DATE	2012/08/22	UNITS	MM	THIRD ANGLE PROJECTION
CHK.		DATE		SIZE	A4	SHEET
APP.		DATE		SCALE	1:1	1 of 1
				DWG NO.	SP-2-6029001	REV: V0
上海联捷电气有限公司 Shanghai Elinker Electric Co., Ltd				TITLE	TR-200A-XXP-130-00A	
					TR-200A-产品	