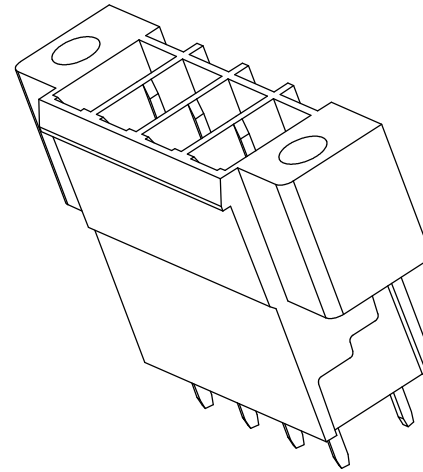
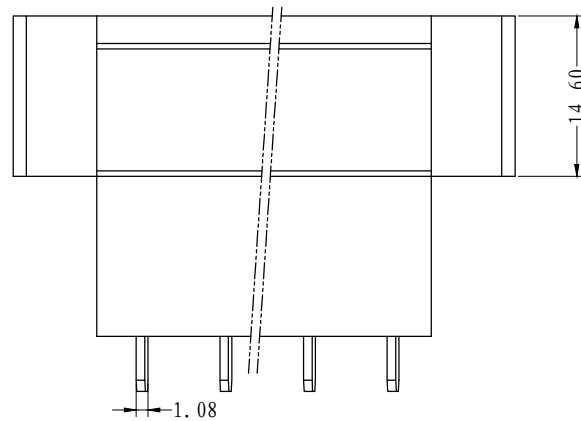
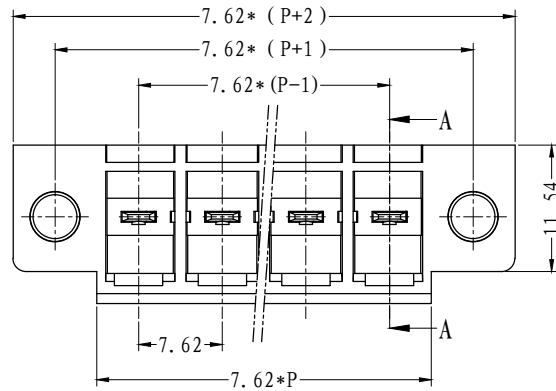


SECTION A-A


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

NOTES:

1. Voltage Rating: 380V, Current Rating: 32A
2. PITCH: 7.62mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
5. Pole: 2-12P

技术要求:

1. 额定电压: 380V, 额定电流: 32A
2. 间距: 7.62mm
3. 耐电压值: AC2500V/min
4. 使用条件: $-40^{\circ} - +105^{\circ}$
5. 极数: 2-12线

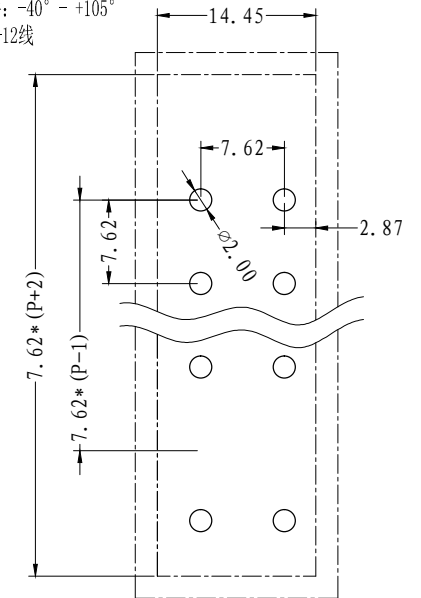

	pitch dimension			Nominal dimension					— □ ○
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LZ1HM-7.62耳朵螺母	SM00B300000V	2	黄铜	
2	LZ1VH-7.62-直针	1154B0001AV	P	黄铜	镀锡
1	LZ1HM-7.62-针套	1154M0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q' TY	MATERIAL	NOTES
DES.	CMZ	DATE	2023/12/23	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
DWG NO.				SP-2-1048002	
TITLE				LZ1VHM-7.62-XXP-1Y-00A	
				LZ1VHM-7.62-成品	