





REVISION RECORD			
REV.	CONTENT	MOD.	DATE
	初版发行		

NOTES:


1. Voltage Rating: 380V, Current Rating: 32A
2. PITCH: 7.62mm
3. Insulation Withstands Voltage: AC2500V/min
4. Using Temperature Range: -40° C ~ +105° C
5. Pole:2-12P

技术要求:

1. 额定电压: 380V, 额定电流: 32A
2. 间距: 7.62mm
3. 耐压值: AC2500V/min
4. 使用条件: -40° - +105°
5. 极数: 2-12线

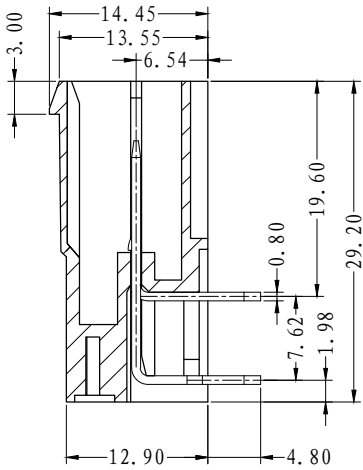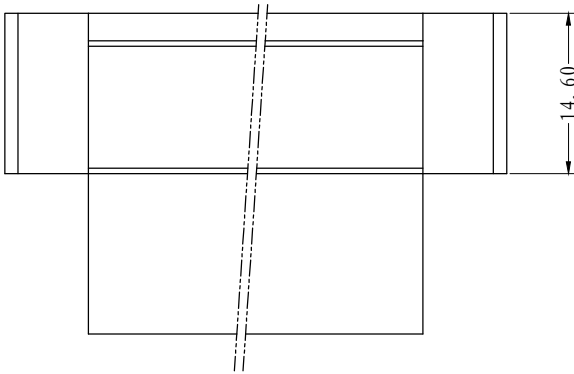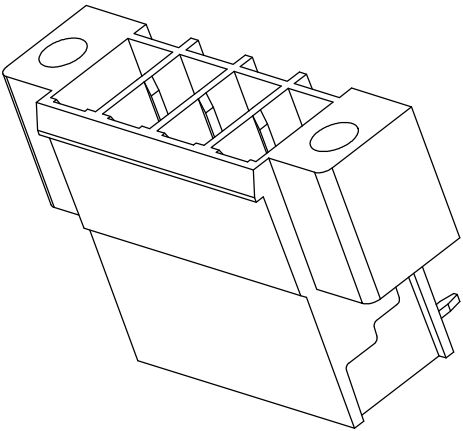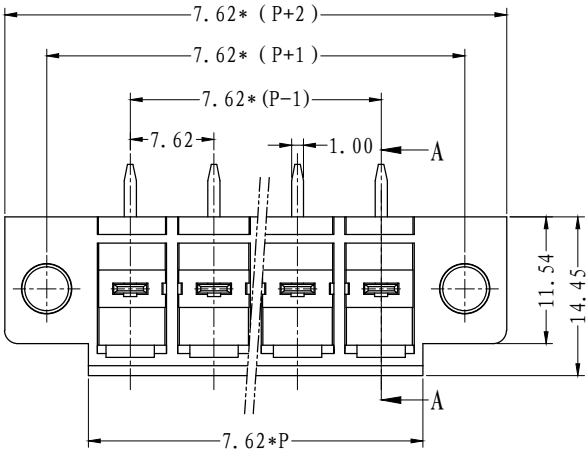

SECTION A-A

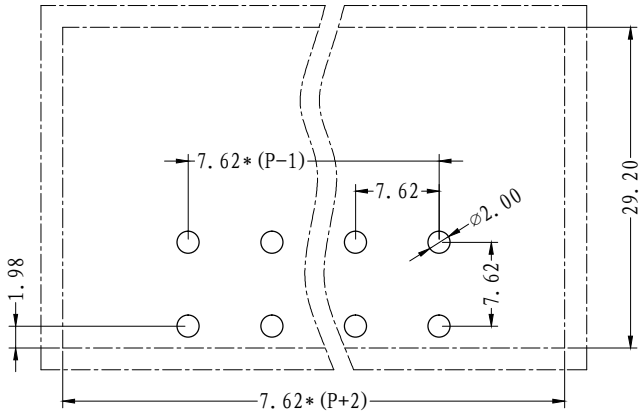

	pitch dimension			Naminal dimension					—
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0	6	10	0	30	60	100	150	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	LZ1HM-7.62耳朵螺母		SM00B300000V		2	黄铜	
2	LZ1RH-7.62-弯针		1154B0002BV		P	黄铜	镀锡
1	LZ1HM-7.62-针套		1154M0YXXAV		1	PA66-V0	
NO.	NAME OF PART		NO. OF PART		Q' TY	MATERIAL	NOTES
DES.	陈明珠	DATE	2023/12/22	UNITS	MM	THIRD ANGLE PROJECTION	SHEET
CHK.	陈旭标	DATE	2023/12/22	SIZE	A4		1 of 1
APP.		DATE		SCALE	1:1	DWG NO.	SP-2-1048002
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD						TITLE	LZ1RHM-7.62-XXP-1Y-00A
							LZ1RHM-7.62-成品