
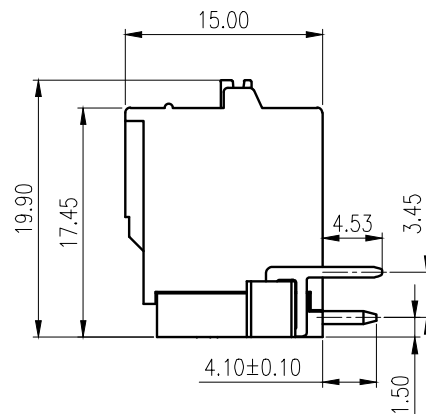
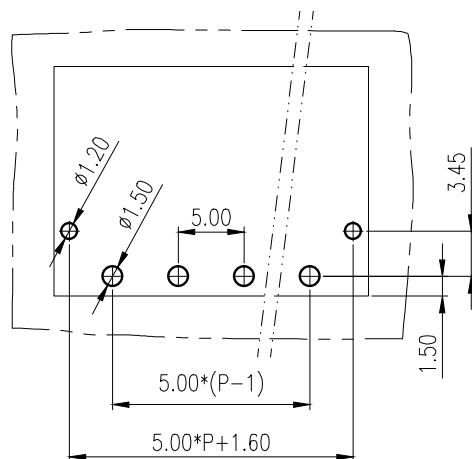
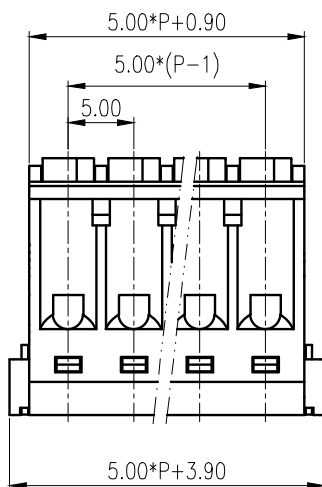


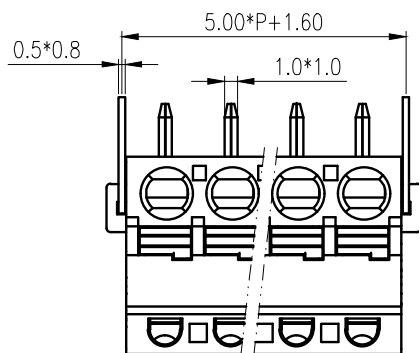

REVISION RECORD			
REV.	CONTENT	MOD.	DATE
0	初版发行		


NOTES:

Pitch : 5.0mm
 Rated Voltage : 300V
 Rated Current : 10A
 Withstand Voltage :
 AC2500V for 1 minute
 Insulation Resistance :
 500MΩ / DC500V
 Using Temperature Range :
 - 40℃ ~ + 105℃
 Wire range : 26~ 12AWG





技术要求:

间距: 5.0mm
 额定电压: 300V
 额定电流: 10A
 耐电压值: AC2500V/min
 绝缘阻抗: 500MΩ/DC500V
 使用条件: -40℃~+105℃
 适用线规: 26~12AWG

	pitch dimension			Namlal dimension					
variable	over	over	over	over	over	over	over	over	—
range	0	6	10	0	30	60	100	150	□
	to	to	to	to	to	to	to		○
	6	10	24	30	60	100	150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	R5.08/5.0耳朵五金件	2080B0003AV	2	黄铜	镀亮锡
5	LS242R-5.08/5.0五金件	2080B0001AV	P	磷青铜	镀亮锡
4	LC6-5.08-弹片	F2A0DLC658BV	P	不锈钢	
3	LC6-5.08-按钮	1020D0Y01AV	P	POM	
2	LS242V/R-5.0-盖板	2088C0YXXAV	1	PA66	
1	LC6-5.0-本体	1152A0YXXAV	1	PA66	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	WY	DATE	2022/04/22	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
 上海联捷电气有限公司 Shanghai Elinker Electric Co., Ltd				THIRD ANGLE PROJECTION	
				 1 of 1	
				DWG NO.	SP-2-2080002
				TITLE	LS242R-5.0-成品

0.5*0.8
5.08*P+1.52
1.0*1.0

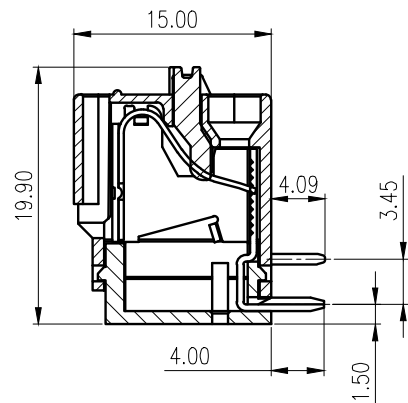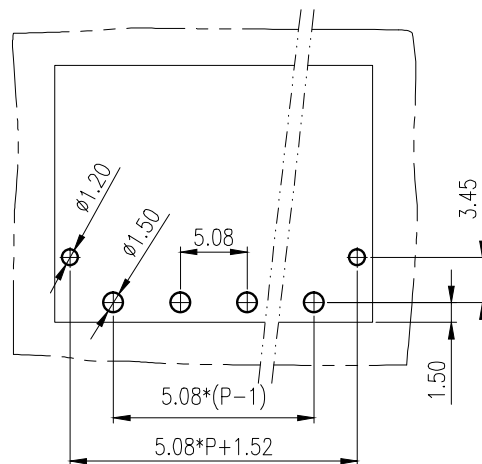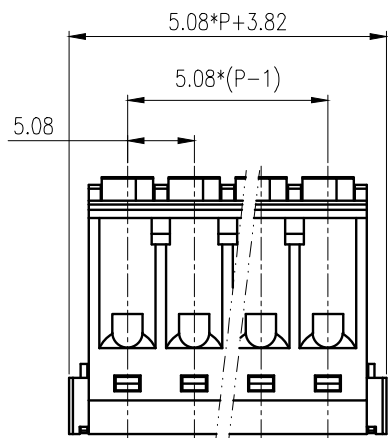

REVISION RECORD

REV.	CONTENT	MOD.	DATE
0	初版发行		


NOTES:

Pitch : 5.08mm
Rated Voltage : 300V
Rated Current : 10A
Withstand Voltage :
AC2500V for 1 minute
Insulation Resistance :
500MΩ / DC500V
Using Temperature Range :
- 40℃ ~ + 105℃
Wire range : 26~ 12AWG

技术要求:

间距: 5.08mm
额定电压: 300V
额定电流: 10A
耐电压值: AC2500V/min
绝缘阻抗: 500MΩ/DC500V
使用条件: -40℃~+105℃
适用线规: 26~12AWG

	pitch dimension			Naminal dimension					— /
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	— /
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

6	R5.08/5.0耳朵五金件		2080B0003AV		2	黄铜	镀亮锡	
5	LS242R-5.08/5.0五金件		2080B0001AV		P	磷青铜	镀亮锡	
4	LC6-5.08-弹片		F2A0DLC658BV		P	不锈钢		
3	LC6-5.08-按钮		1020D0Y01AV		P	POM		
2	LS242-5.08-盖板		2083N0YXXAV		1	PA66		
1	LC6-5.08-本体		1020A0YXXAV		1	PA66		
NO.		NAME OF PART		NO. OF PART		Q'TY	MATERIAL	NOTES
DES.		ZD	DATE	2020/11/7	UNITS	MM	THIRD ANGLE PROJECTION 	SHEET
CHK.			DATE		SIZE	A4		1 of 1
APP.			DATE		SCALE	1:1	DWG NO.	SP-2-20830002 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric C O.,LTD							TITLE	LS242R-5.08-XXP-1Y-00
								LS242R-5.08-成品