
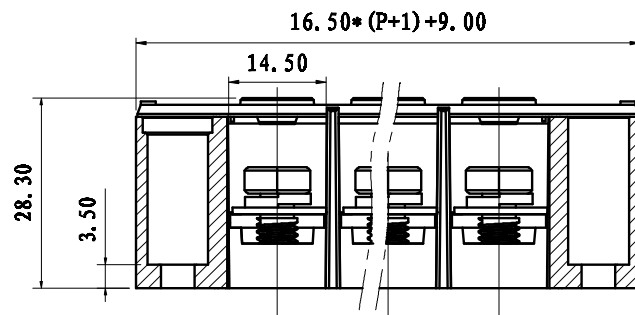


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

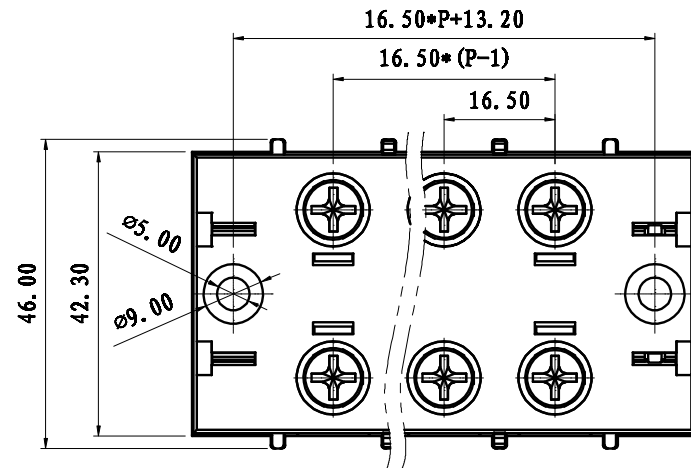

技术要求:

额定电压: 600V


额定电流: 60A

螺钉类型/扭力: M6/2.5 N.m

绝缘材料类型: PC

阻燃等级: V0

导线截面: 10mm² max



	pitch dimension			Nominal dimension					—
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		▱
	6	10	24	30	60	100	150		⌒
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

5	TB-60A-标记条		1	A4膜纸	
4	TB-60A-防护罩	60TBC706030V	1	PC	透明
3	TB-60A-螺丝	SWBSA6012Q2V	2P	碳钢	镀锌
2	JH9-60A-导电件	60TBBDD060AV	P	黄铜	镀镍
1	TB-60A-本体	60TBE306030V	1	PC	黑色
NO.	NAME OF PART	NO. OF PART	QTY	MATERIAL	NOTES
DES.	LDD	DATE 2016/03/07	UNITS mm	THIRD ANGLE PROJECTION	
CHK.		DATE	SIZE A4	1 of 1	
APP.		DATE	SCALE 1:1	DWG NO.	SP-2-6TBM603 REV: V0
 上海联捷电气有限公司 Shanghai Elinker Electric CO.,LTD				TITLE	TB1-60XX-A-1Y-00A
					TB1-60A-成品